

ASIA PACIFIC SHENGRUI LIMITED

Phone +00852 56261528

info@apacfan.com

www.apacfan.com

Nominal data

Type	R3G500-RA28-03	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1900
Power consumption	W	3650
Current draw	A	5.6
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	63.1	57.4	09 Power consumption P_{ed}	kW	3.65
02 Measurement category		A		09 Air flow q_v	m ³ /h	8095
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	983
04 Efficiency grade N		67.7	62	10 Speed (rpm) n	min ⁻¹	1905
05 Variable speed drive		Yes		11 Specific ratio [*]		1.01

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

^{*} Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-182081



Technical description


Weight	21 kg
Size	500 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.0 - Motor current limitation - RFID - ISO 15693 compatible - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1

Product drawing

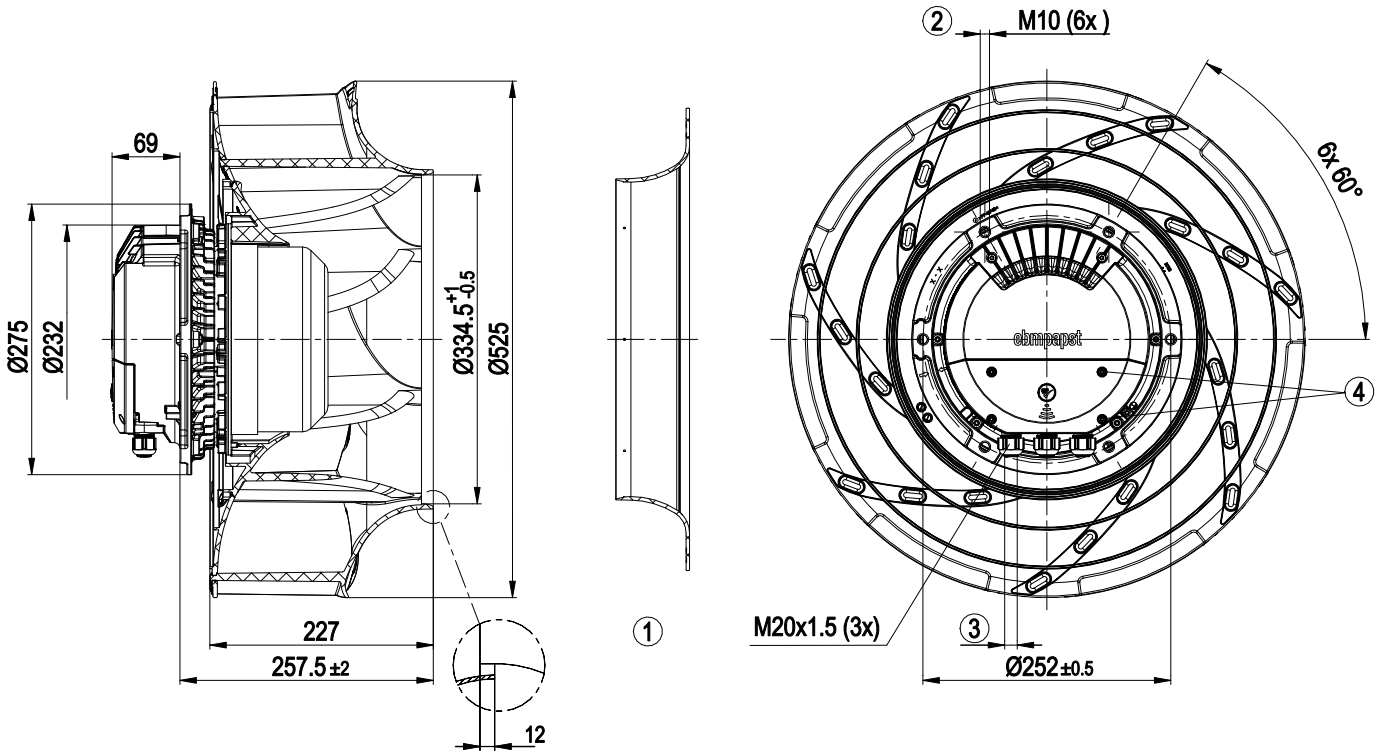

1	Accessory part: inlet ring 50901-2-2943 not included in scope of delivery
2	Max. clearance for screw 20 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque 2 ± 0.3 Nm
4	Tightening torque 1.5 ± 0.2 Nm

Accessory part

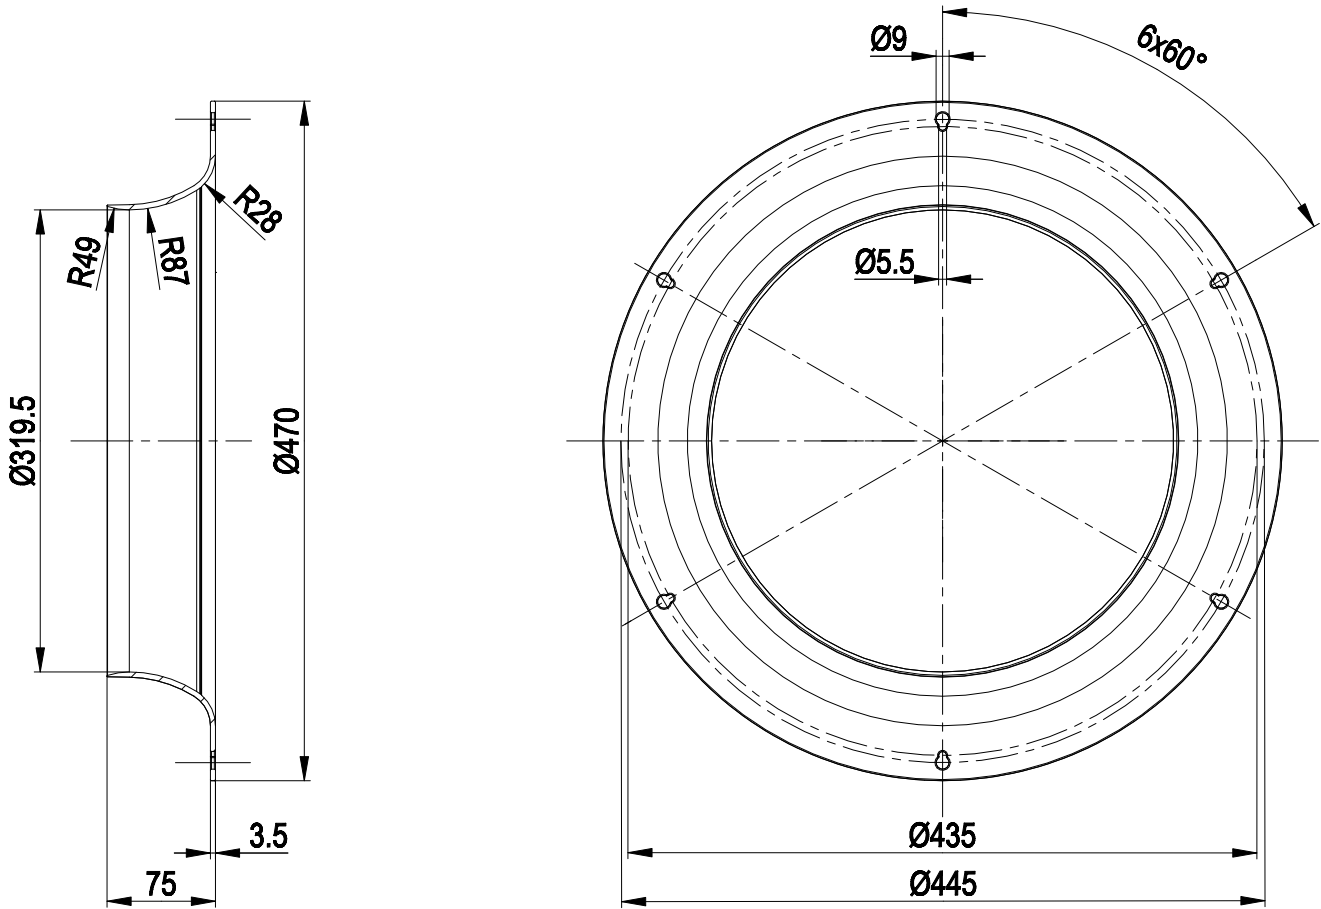


1 Accessory part: inlet ring 50901-2-2943

EC centrifugal fan - RadiCal

backward-curved, single-intake

Connection diagram

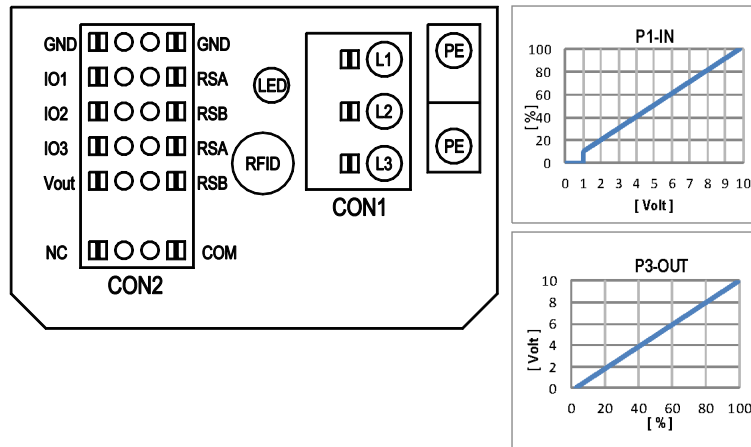

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment


	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	electrical specification	configurable IO mode	CON2
D101 [..]	source: set value				○
D147 [..]	source: sensor value				○
D104 [..]	switch: parameter set: #1 / #2				○
D12E [..]	switch: control function: heating (pos.) / cooling (neg.)				○
D148 [..]	switch: direction of rotation: cw / ccw				○
D16C [..]	switch: set value source				○
D16A [..]	switch: fan enable / disable				○
(selected directly via IO mode)	signal: tach out				
(selected directly via IO mode)	signal: diagnostics out				
D130 [0]	signal: fan modulation level %				
D130 [1]	signal: actual speed				
D130 [2]	signal: system modulation level %				
D130 [5]	signal: remote control output 0-10V				
D00C [1]	pulse input for auto-addressing				○
D130 [4]	pulse output for auto-addressing				
D101 [..]	source: set value				○
D103	<ul style="list-style-type: none"> source: set value source: sensor value switch: parameter set: #1 / #2 switch: control function: heating (pos.) / cooling (neg.) switch: direction of rotation: cw / ccw switch: set value source switch: fan enable / disable signal: tach out signal: diagnostics out signal: fan modulation level % signal: actual speed signal: system modulation level % signal: remote control output 0-10V pulse input for auto-addressing pulse output for auto-addressing 		active: applied voltage 3.5-50VDC, SELV Ri=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$, SELV Umax=50VDC, Imax=20mA, SELV Umax=50VDC, Imax=20mA, SELV not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV Ri=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$, SELV Ri=125R, characteristic curve parameterizable, SELV not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV 40Hz - 10kHz, characteristics parameterizable not active: pin open or applied voltage 3.5-50VDC active: applied voltage < 1.5VDC, SELV function parameterizable, max. 5mA, max output frequency 300Hz, SELV 0-10V max. 5mA, max output frequency 300Hz, SELV 0-10V max. 5mA, max output frequency 300Hz, SELV MODBUS RTU, specification V6.0, SELV	<ul style="list-style-type: none"> ○ Ain1 0-10V/PWM: analog input ○ PWMIn3: digital input 	101 102 103
Vout	alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage				

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.0



Curves: Air performance 50 Hz

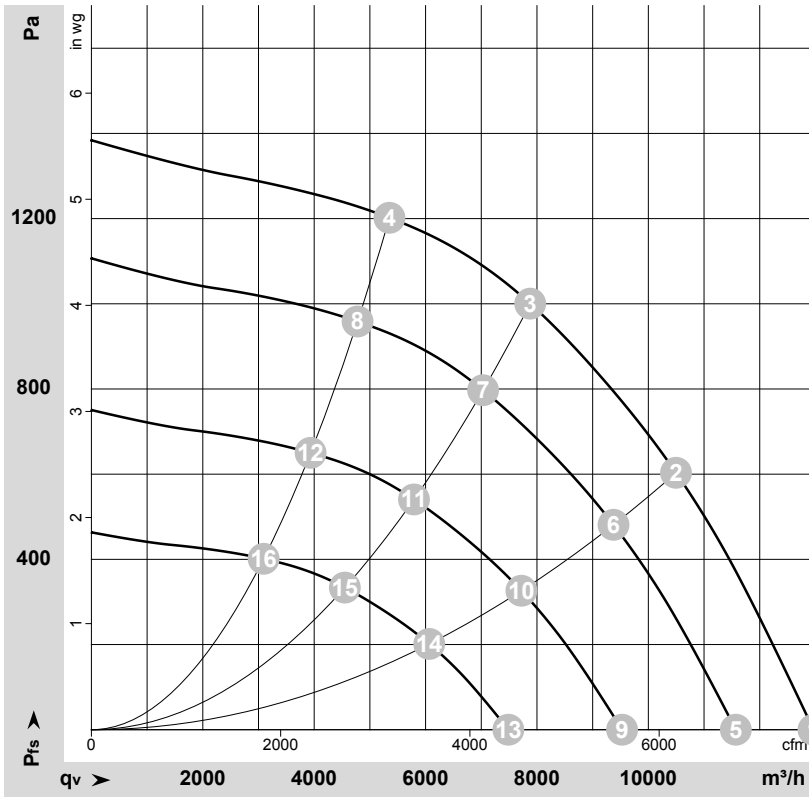

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-182081-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	400	50	1900	2554	3.95	82	89	96	12965	0	7630	0.00
2	400	50	1900	3485	5.34	77	85	91	10495	600	6180	2.41
3	400	50	1900	3650	5.60	73	80	87	7880	1000	4635	4.01
4	400	50	1900	3248	4.98	77	84	89	5350	1200	3150	4.82
5	400	50	1700	1815	2.80	79	86	93	11570	0	6810	0.00
6	400	50	1700	2482	3.80	74	82	88	9375	481	5515	1.93
7	400	50	1700	2584	3.96	70	77	84	7035	800	4140	3.21
8	400	50	1700	2313	3.55	74	82	86	4780	960	2815	3.85
9	400	50	1400	1014	1.57	74	81	88	9530	0	5610	0.00
10	400	50	1400	1386	2.12	70	77	84	7720	326	4545	1.31
11	400	50	1400	1443	2.21	65	72	79	5790	543	3410	2.18
12	400	50	1400	1292	1.98	69	77	81	3935	651	2315	2.61
13	400	50	1100	492	0.76	68	75	82	7485	0	4405	0.00
14	400	50	1100	672	1.03	63	71	77	6065	202	3570	0.81
15	400	50	1100	700	1.07	59	66	73	4550	335	2680	1.34
16	400	50	1100	626	0.96	63	71	75	3090	402	1820	1.61

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase

