

Product Data Sheet 614J/2HHPR-010

ebm**papst**

Die Wahl der Ingenieure



614J/2HHPR-010

INDEX

1	General	3
2	Mechanics	3
2.1	General	3
2.2	Connections	3
3	Operating Data	5
3.1	Operating Data - Electrical Interface - Input	5
3.2	Electrical Operating Data	6
3.3	Operating Data - Electrical Interface -Output	7
3.4	Electrical Features	8
3.5	Aerodynamic	9
3.6	Sound Data	10
4	Environment	10
4.1	General	10
4.2	Climatic requirements*)	10
5	Safety	11
5.1	Electrical Safety	11
5.2	Approval Tests	11
6	Reliability	11
6.1	General	11

1 General


Fan type	Axial fan	
Rotational direction looking at rotor	clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	

2 Mechanics**2.1 General**

Width	60,0 mm	
Height	60,0 mm	
Depth	32,0 mm	
Weight	0,100 kg	
Housing material	Plastic	
Impeller material	Plastic	

2.2 Connections

Electrical connection	Wires	
Length of lead wire	L = 400 mm	
Tolerance	+/- 10,0 mm	
Wire gauge (AWG)	24	
Insulation diameter	1,45 mm	
Contact	see drawing	

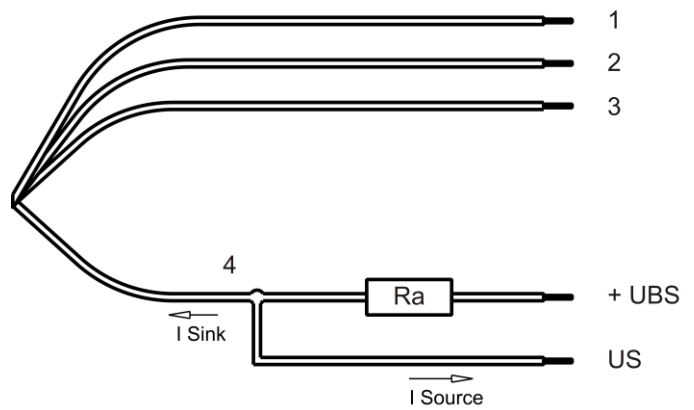

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	black	PWM
Wire 4	white	Tacho

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.


3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	PWM
---------------	-----

Features

Input type	Open collector	
PWM - Frequency		1 kHz - 30 kHz Typical: 5 kHz

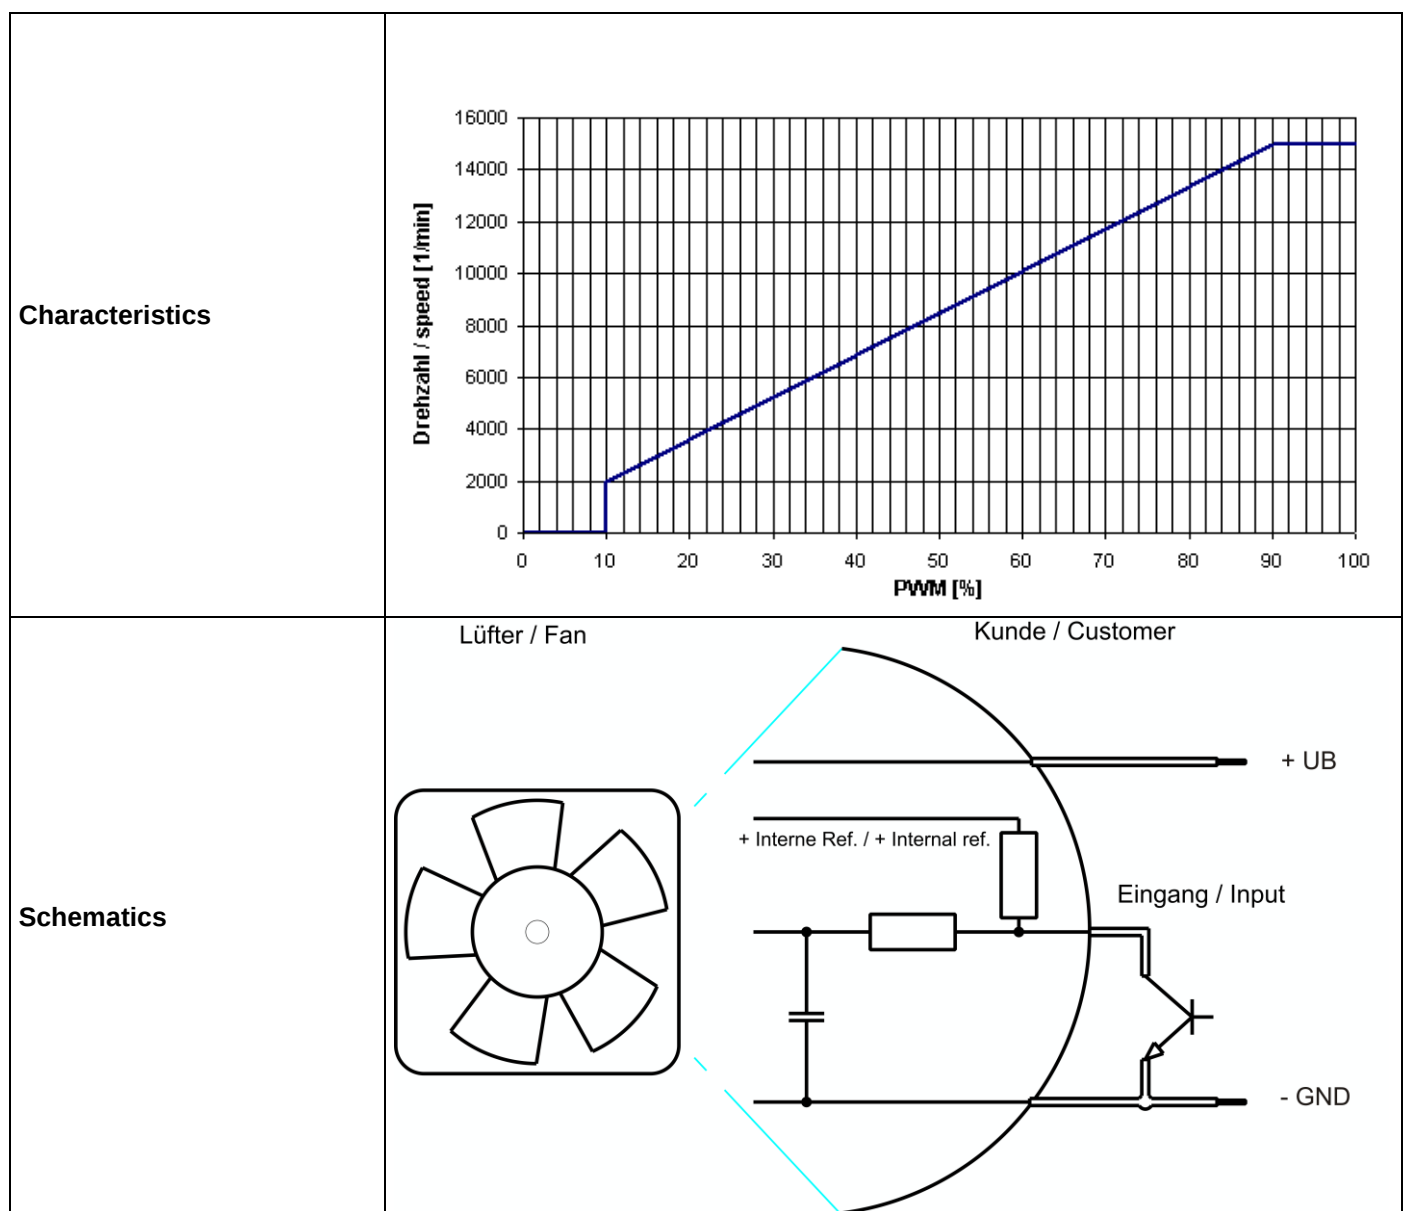

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
 I: corresp. to arithm. mean current value


Name	Condition				
PWM 0001	PWM: 95 %;	f: 1 kHz		f: 30 kHz	
Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	18,0 V		30,0 V
Nominal voltage	$\Delta p = 0$	U_N		24,0 V	
Power consumption	$\Delta p = 0$	P	7,5 W	14,2 W	14,7 W
Tolerance	PWM 0001		+/- 17,5 %	+/- 25,0 %	+/- 25,0 %
Current consumption	$\Delta p = 0$	I	415 mA	590 mA	490 mA
Tolerance	PWM 0001		+/- 17,5 %	+/- 25,0 %	+/- 25,0 %
Speed	$\Delta p = 0$	n	11.900 1/min	15.000 1/min	15.000 1/min
Tolerance	PWM 0001		+/- 12,5 %	+/- 6,0 %	+/- 6,0 %
Starting current consumption				2.000 mA	

Name	Condition				
PWM 0002	PWM: 9 %;	f: 1 kHz		f: 30 kHz	
Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	18,0 V		30,0 V
Nominal voltage	$\Delta p = 0$	U_N		24,0 V	
Power consumption	$\Delta p = 0$	P	0,5 W	0,7 W	0,8 W
Tolerance	PWM 0002		+/- 25,0 %	+/- 25,0 %	+/- 25,0 %
Current consumption	$\Delta p = 0$	I	29 mA	28 mA	28 mA
Tolerance	PWM 0002		+/- 25,0 %	+/- 25,0 %	+/- 25,0 %
Speed	$\Delta p = 0$	n	2.000 1/min	2.000 1/min	2.000 1/min
Tolerance	PWM 0002		+/- 6,0 %	+/- 6,0 %	+/- 6,0 %

3.3 Operating Data - Electrical Interface -Output

Tacho type	/2 (Open collector)
------------	---------------------

Signal-Ausgangsspannung / Signal output voltage

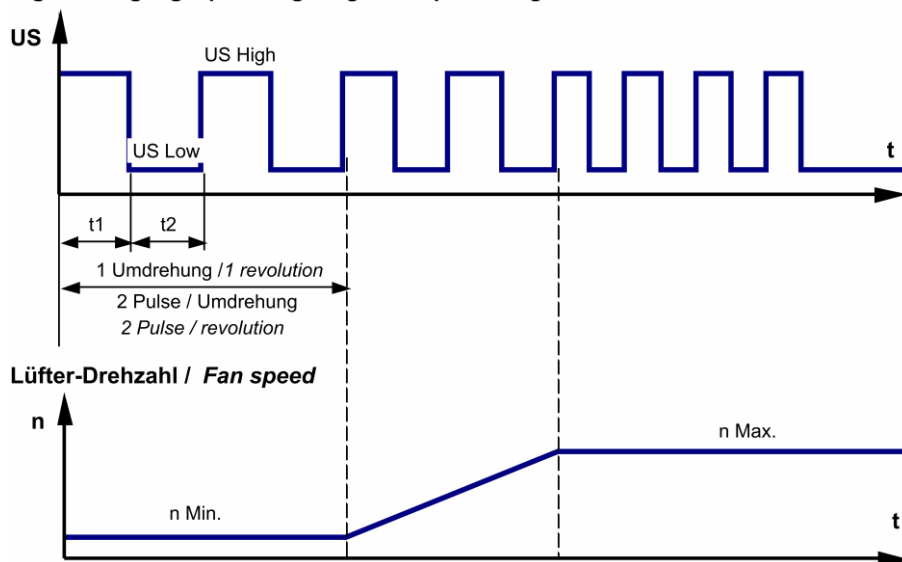


$$R_a = \frac{U_{BS} - US_{Low}}{I_{Sink}}$$

Features	Note	Values
Tacho operating voltage (UBS)		<= 60 V
Tacho signal Low	I sink: 2 mA	<= 0,4 V
Tacho signal High	I source: 0 mA	<= 60 V
Maximum sink current		<= 20 mA
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(2 x n) / 60	
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us

Alarm type	None
------------	------

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at U_n	Rectifying diode $I_F \leq 2 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at U_n	approx. 1.650 mA	
Clock signal t_3/t_4 at locked rotor	Typical: 0,3 s / 5,3 s	

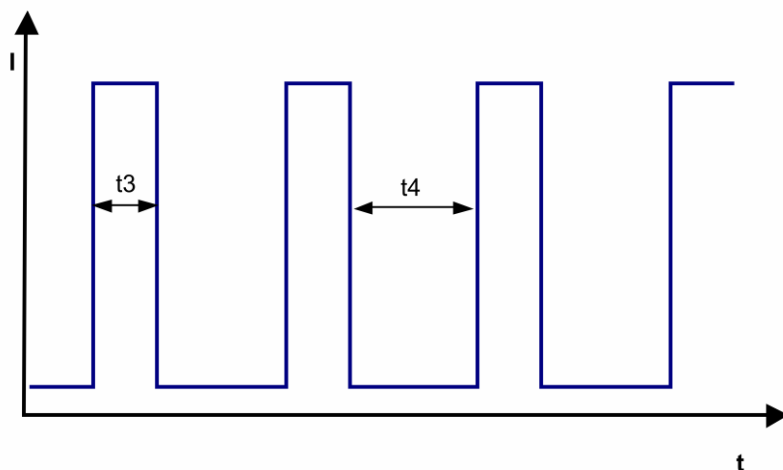

3.5 Aerodynamic

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;


In the intake and outlet area should not be any solid obstruction within 0,5 m.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

15.000 1/min at free air flow	PWM 95 %;	f: 1 kHz	f: 30 kHz
-------------------------------	-----------	----------	-----------

Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \text{max.}$)	82,0 m ³ /h	
Max. static pressure ($\Delta p = \text{max.}$ / $\dot{V} = 0$)	570 Pa	

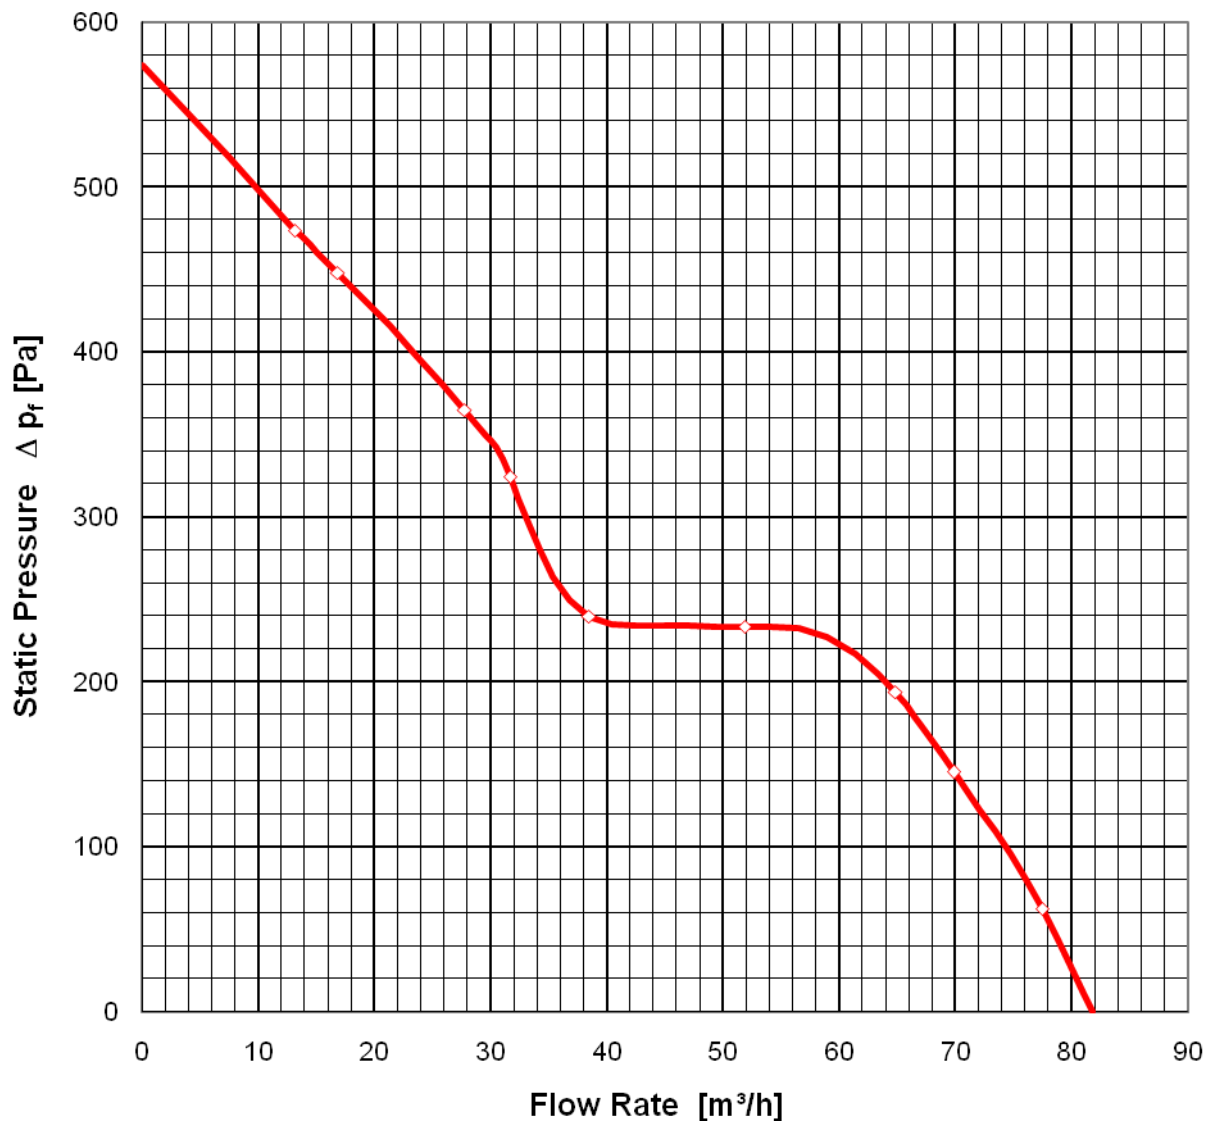

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see section 3.5

a.) Operation condition:

15.000 1/min at free air flow	PWM 95 %	PWM min.: f: 1 kHz	PWM max.: f: 30 kHz
-------------------------------	----------	--------------------	---------------------

Optimal operating point	75,0 m3/h @ 121 Pa	
Sound power level at the optimal operating point	7,6 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	62,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-40 °C	
Max. permitted ambient temperature TU max.	78 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

For start-up conditions, the ambient temperature has to be > - 20°C !!

4.2 Climatic requirements*)

Humidity requirements	humid heat, cyclic; according to DIN EN 60068-2-30, 6 cycle	
Water exposure	None	
Dust requirements	Dust check; according to DIN EN 60068-2-68, 6g/m2d, 1 day	
Salt fog requirements	None	

*) Permitted application area:

The product is for the use in sheltered rooms with limited controlled temperature. Occasionally condensed water is allowed. Direct exposure to water must be avoided. Saline ambient conditions must be avoided.

Pollution degree 2 (according DIN EN 60664-1)

It occurs only non-conductive pollution. Occasionally, temporary conductivity caused by condensation occurs.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	No
CCC	China Compulsory Certification	No



6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	65.000 h	
Life expectancy L10 at TU = 75 °C	25.000 h	
Life expectancy L10 IPC at TU = 40 °C	110.000 h	

Schaltrelais nach DIN EN 60959 beachten!
Refer to protection notice B01 300 10006-1

Copies of this document and giving it, either not the use or communication of the contents thereof, are
prohibited without express written permission. Offenders are liable to the payment of damages. All rights are reserved
in the event of the grant of a patent or the registration of a utility model or design.

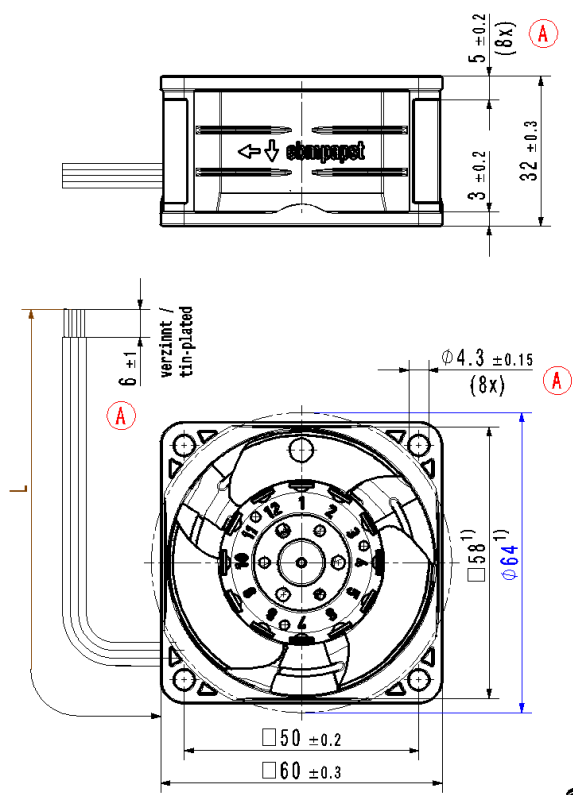

- 1.) Maße für Montagewand
- Anzahl und Länge der Litzen siehe Produktspezifikation
 - Kein Axialspiel bei Kugellager durch Federausgleich
- 1.) Dimensions for worktop mounting
- Number and length of the wires see product specification
 - No axial clearance in ball bearings by spring compensation

				Werkstoff / Material:		Volumen / Volume (mm³):	
SAP-Status/State	Änd.-Nr./ Change-No.	CATIA-System-Version/ CATIA-System-Version	CAD-Umgebung/ CAD-Environment			Gewicht / Mass (g):	
		9892S10009 CFR000A		Artikel / Title:			
		3D-Referenzmodell / 3D-Referenzmodell					
Tolerierung / Tolerances:		Beurh./ Drawn	Datum	Name	Zug.-Nr. / Drawing No:		
Allgemeintoleranzen / Gen. Tolerances:		Gepr./ Checked					
		Freig./ Released			Ers.f.Zugb. / Replaces:		
							
		ebm-papst St.Georgen GmbH & Co KG			Dokumenttyp / Type of Document	Teildokument (Blatt/Page)	Index / Index
					Format / Size:		Masstab/Scale 1:2