

AC centrifugal fan

forward curved, single inlet
with housing (large flange)



ASIA PACIFIC SHENGRUI LIMITED

Phone +00852 56261528

info@apacfan.com

www.apacfan.com



Nominal data

Type	G4D200-CL12-01				
Motor	M4D074-EI				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		fa	ml	fa	ml
Valid for approval / standard		CE	CE	CE	CE
Speed	min ⁻¹	1300	1550	1300	1550
Power input	W	360	340	360	340
Current draw	A	1.14	1.07	0.66	0.62
Min. back pressure	Pa	0	250	0	250
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	45	30	45	30
Starting current	A	1.7	1.7	1.7	1.7

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	B
Efficiency category	Total
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_f / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_e	%	37.8	30.8	37.8
Efficiency grade N		49	42	49
Power input P_e	kW	0.17		
Air flow q_v	m ³ /h	800		
Pressure increase p_f	Pa	287		
Speed n	min ⁻¹	1425		

Data definition with optimum efficiency. LU-105245
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



AC centrifugal fan

forward curved, single inlet
with housing (large flange)


Technical features

Mass	7.4 kg
Size	200 mm
Surface of rotor	Coated in black
Material of impeller	Sendzimir galvanized sheet steel
Housing material	Sendzimir galvanized sheet steel
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"B"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1
Approval	CCC

AC centrifugal fan

forward curved, single inlet
with housing (large flange)

Product drawing

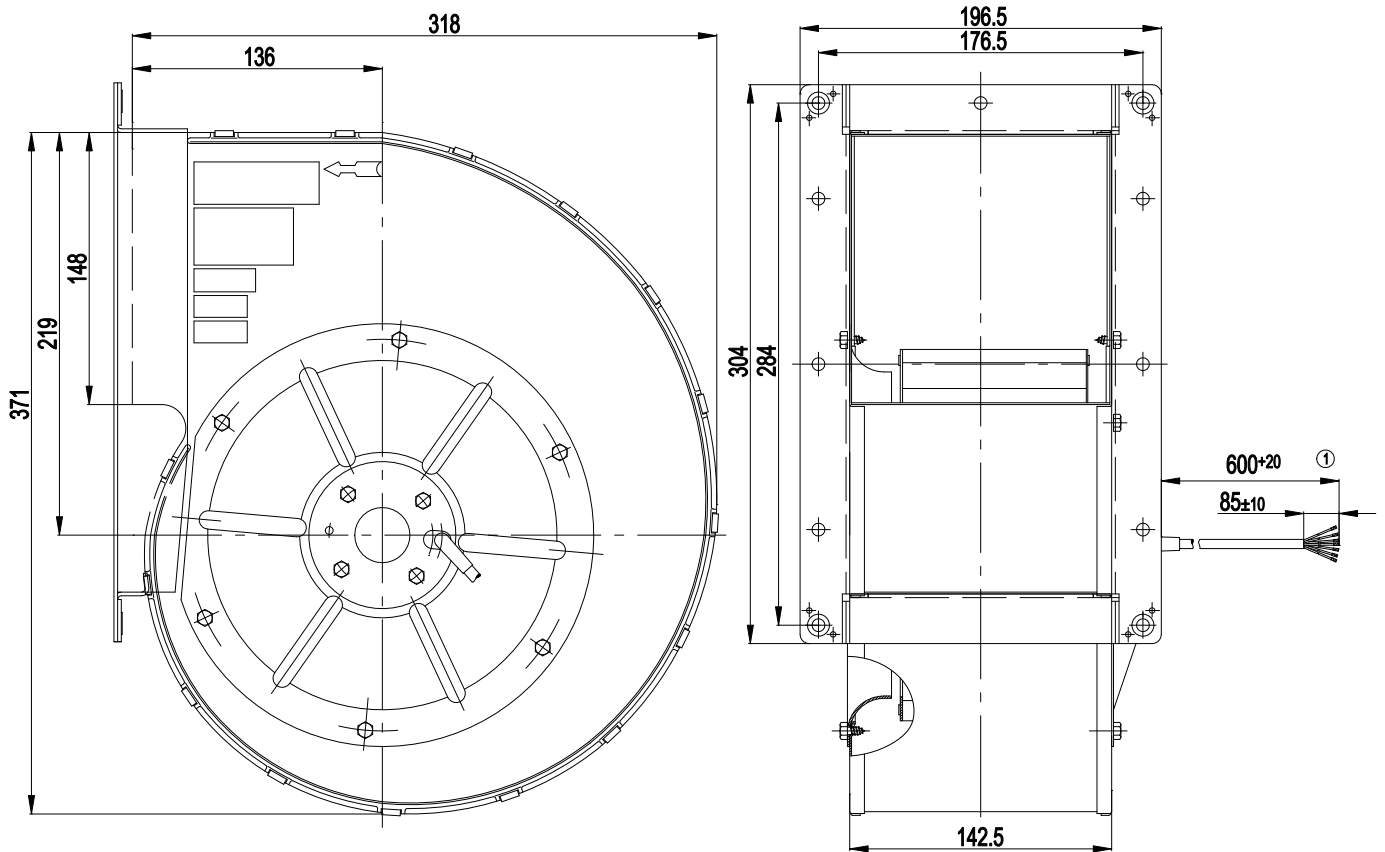


1 Connection line PVC 7G 0.5 mm², 7x brass lead tips crimped

AC centrifugal fan

forward curved, single inlet
with housing (large flange)

Connection screen

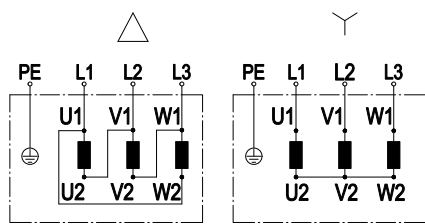

Change direction of rotation by reversing two phases


	Three-phase motor	Δ	Delta connection	Y	Star connection
L1	= U1 = black	L2	= V1 = blue	L3	= W1 = brown
U2	green	V2	white	W2	yellow
PE	green/yellow				



AC centrifugal fan

forward curved, single inlet
with housing (large flange)

Charts: Air flow 50 Hz

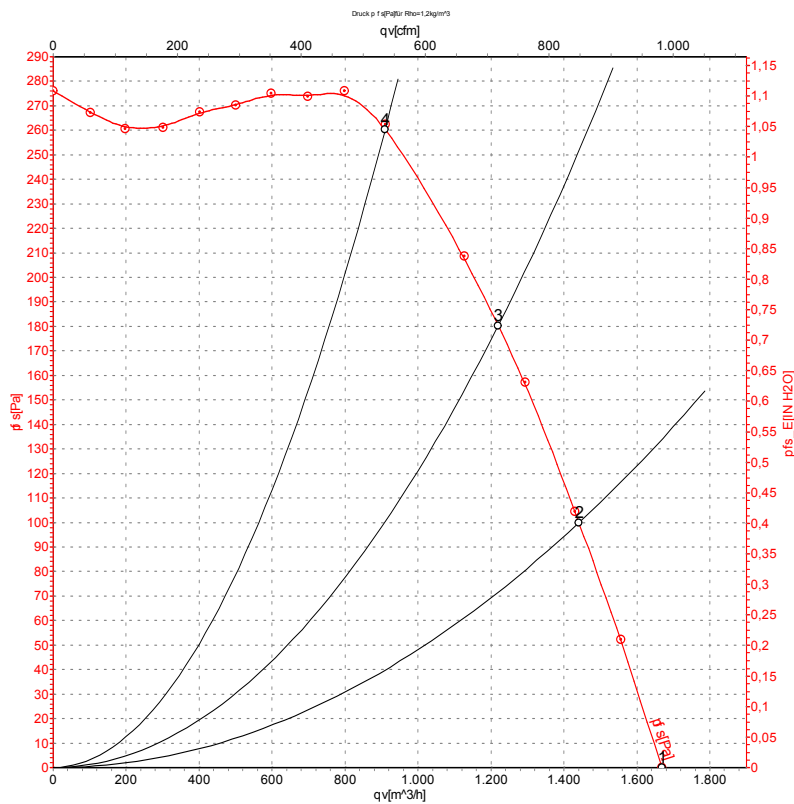

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	400	50	1300	360	0.66	1670	0
2	400	50	1335	299	0.58	1440	100
3	400	50	1370	251	0.53	1220	180
4	400	50	1410	195	0.48	910	260


U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase



AC centrifugal fan

forward curved, single inlet
with housing (large flange)

Charts: Air flow 60 Hz

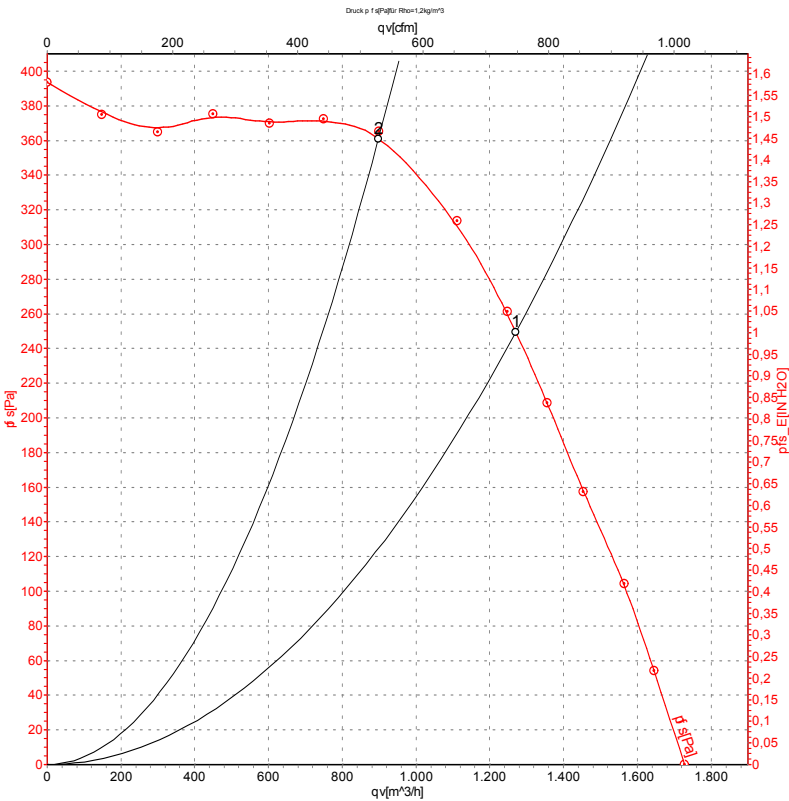

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	400	60	1550	340	0.62	1270	250
2	400	60	1635	239	0.45	900	365

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

