

# EC centrifugal module - RadiPac

backward curved, single inlet  
with support bracket



ASIA PACIFIC SHENGRUI LIMITED Phone +  
00852 56261528  
info@apacfan.com  
www.apacfan.com



## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G500-AP25-01    |            |
| Motor                    | M3G150-FF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed                    | min <sup>-1</sup> | 1780       |
| Power input              | W                 | 2825       |
| Current draw             | A                 | 4.3        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | +60        |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | Yes    |
| Specific ratio*       | 1.01   |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

|                                | Actual            | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | 66.5              | 52.3         | 56.3         |
| Efficiency grade N             | 72.2              | 58           | 62           |
| Power input $P_{ed}$           | kW                | 2.86         |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 8140         |              |
| Pressure increase $p_{fs}$     | Pa                | 799          |              |
| Speed n                        | min <sup>-1</sup> | 1790         |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.




## Technical features

|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 40 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Size                                                               | 500 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Surface of rotor                                                   | Coated in black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Material of electronics housing                                    | Die-cast aluminium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Material of impeller                                               | Aluminium sheet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Material of mounting plate                                         | Sheet steel, hot-dip galvanised                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Material of support bracket                                        | Steel, coated in black plastic (RAL 9005)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Material of inlet nozzle                                           | Sheet steel, hot-dip galvanised                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Number of blades                                                   | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Direction of rotation                                              | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Insulation class                                                   | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Humidity class                                                     | F4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Mounting position                                                  | Refer to product drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Condensate discharge holes                                         | Rotor-side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- External 24 V input (programming)</li> <li>- RS485 MODBUS-RTU</li> <li>- PFC, passive</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Over-temperature protected electronics / motor</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Input for sensor 0-10 V and 4-20 mA</li> <li>- Output for slave 0-10 V</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Line undervoltage / phase failure detection</li> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| EMC interference emission                                          | Acc. to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Electrical leads                                                   | Via terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Motor protection                                                   | Reverse polarity and locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Product conforming to standard                                     | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Approval                                                           | UL 1004-7 + 60730; GOST; C22.2 Nr.77 + CAN/CSA-E60730-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

# EC centrifugal module - RadiPac

backward curved, single inlet  
with support bracket

## Product drawing

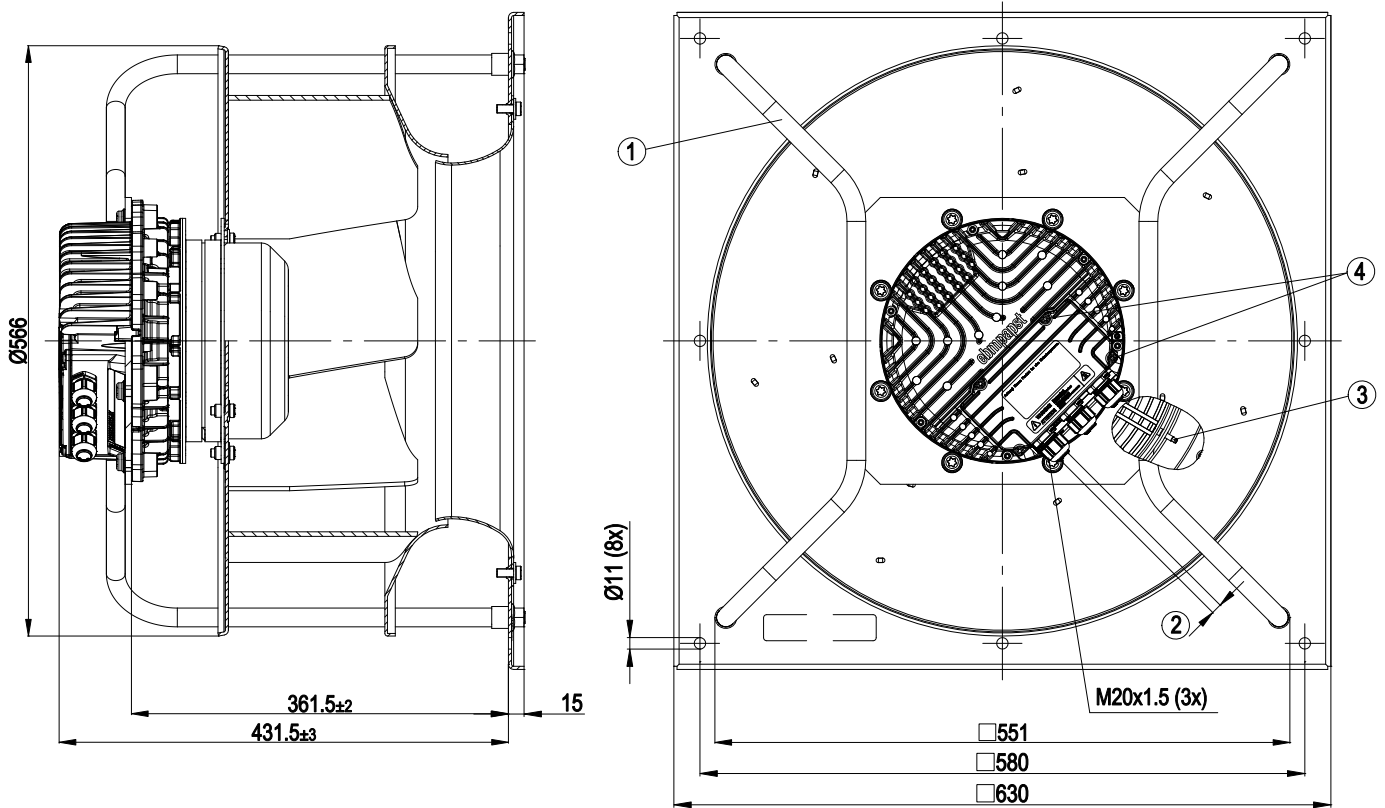


- |   |                                                                                                                                                        |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Installation position: shaft horizontal (install the support struts only vertically as shown in the view!) or rotor on bottom; rotor on top on request |
| 2 | Cable diameter min. 4 mm, max. 10 mm; tightening torque $4 \pm 0.6$ Nm                                                                                 |
| 3 | Inlet nozzle with pressure tap (k-factor: 281)                                                                                                         |
| 4 | Tightening torque $3.5 \pm 0.5$ Nm                                                                                                                     |

# EC centrifugal module - RadiPac

backward curved, single inlet


with support bracket

## Connection screen

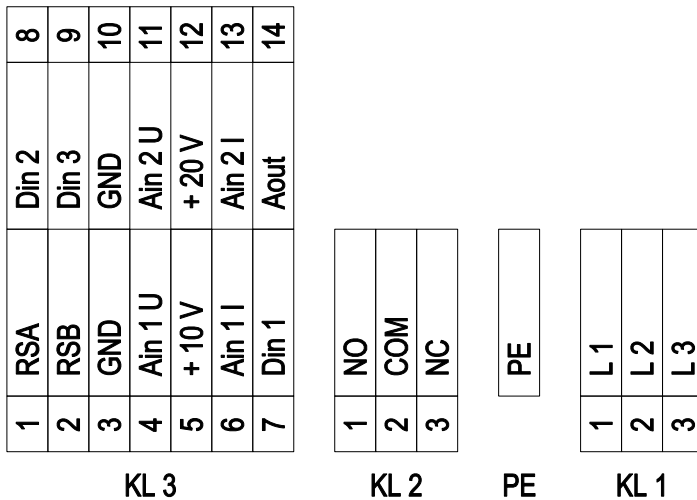

| No.  | Pin    | Signal | Function / assignment                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------|--------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KL 1 | 1      | L1     | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                         |
| KL 1 | 2      | L2     | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                         |
| KL 1 | 3      | L3     | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                         |
| PE   |        | PE     | Earth connection, PE connection                                                                                                                                                                                                                                                                                                                                                                                                         |
| KL 2 | 1      | NO     | Status relay, floating status contact; normally open; close with error                                                                                                                                                                                                                                                                                                                                                                  |
| KL2  | 2      | COM    | Status relay; floating status contact; changeover contact; common connection; contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA                                                                                                                                                                                                                                                                                                      |
| KL2  | 3      | NC     | Status relay, floating status contact; break with error                                                                                                                                                                                                                                                                                                                                                                                 |
| KL 3 | 1      | RSA    | Bus connection RS485; RSA; MODBUS RTU                                                                                                                                                                                                                                                                                                                                                                                                   |
| KL 3 | 2      | RSB    | Bus connection RS485; RSB; MODBUS RTU                                                                                                                                                                                                                                                                                                                                                                                                   |
| KL 3 | 3 / 10 | GND    | Signal ground for control interface KL3                                                                                                                                                                                                                                                                                                                                                                                                 |
| KL 3 | 4      | Ain1 U | Analogue input 1 (set value); 0-10 V; Ri= 100 kΩ; parametrisable curves; only usable as alternative to input Ain1 I                                                                                                                                                                                                                                                                                                                     |
| KL 3 | 5      | + 10 V | Fixed voltage output 10 VDC; + 10 V +/-3%; max. 10 mA; short circuit proof; power supply for ext. devices (e.g. potentiometer)                                                                                                                                                                                                                                                                                                          |
| KL 3 | 6      | Ain1 I | Analogue input 1 (set value); 4-20 mA; Ri= 100 Ω; parametrisable curves; only usable as alternative to input Ain1 U                                                                                                                                                                                                                                                                                                                     |
| KL 3 | 7      | Din1   | Digital input 1: enabling of electronics; enabling: open pin or applied voltage 5 to 50 VDC; disabling: bridge to GND or applied voltage < 1 VDC; reset function: triggers software reset after a level change to <1 V                                                                                                                                                                                                                  |
| KL 3 | 8      | Din2   | Digital input 2: parameter set switch 1/2; according to EEPROM setting, the valid/used parameter set is selectable per BUS or per digital input DIN2. Parameter set 1: open pin or applied voltage 5 to 50 VDC; parameter set 2: bridge to GND or applied voltage < 1 VDC                                                                                                                                                               |
| KL 3 | 9      | Din3   | Digital input 3: Control characteristic of the integrated controller; according to EEPROM setting, the control characteristic of the integrated controller is normally/inversely selectable per BUS or per digital input; normal: open pin or applied voltage 5 to 50 VDC (control deviation = actual sensor value - set value) inverse: bridge to GND or applied voltage < 1 VDC (control deviation = set value - actual sensor value) |
| KL 3 | 11     | Ain2 U | Analogue input 2; actual sensor value 0-10 V; Ri= 100 kΩ; parametrisable curve; only usable as alternative to input Ain2 I                                                                                                                                                                                                                                                                                                              |
| KL 3 | 12     | + 20 V | Fixed voltage output 20 VDC; + 20 V +/-25/-10 %; max. 50 mA; short circuit proof; power supply for ext. devices (e.g. sensors)                                                                                                                                                                                                                                                                                                          |
| KL 3 | 13     | Ain2 I | Analogue input 2; actual sensor value 4-20 mA; Ri= 100 Ω; parametrisable curve; only usable as alternative to input Ain2 U                                                                                                                                                                                                                                                                                                              |
| KL 3 | 14     | Aout   | Analogue output 0-10 V; max. 5 mA; output of the actual motor control factor (output voltage of electronics)/ of the actual motor speed; function selectable per bus; parametrisable curve.                                                                                                                                                                                                                                             |

## Charts: Air flow 50 Hz

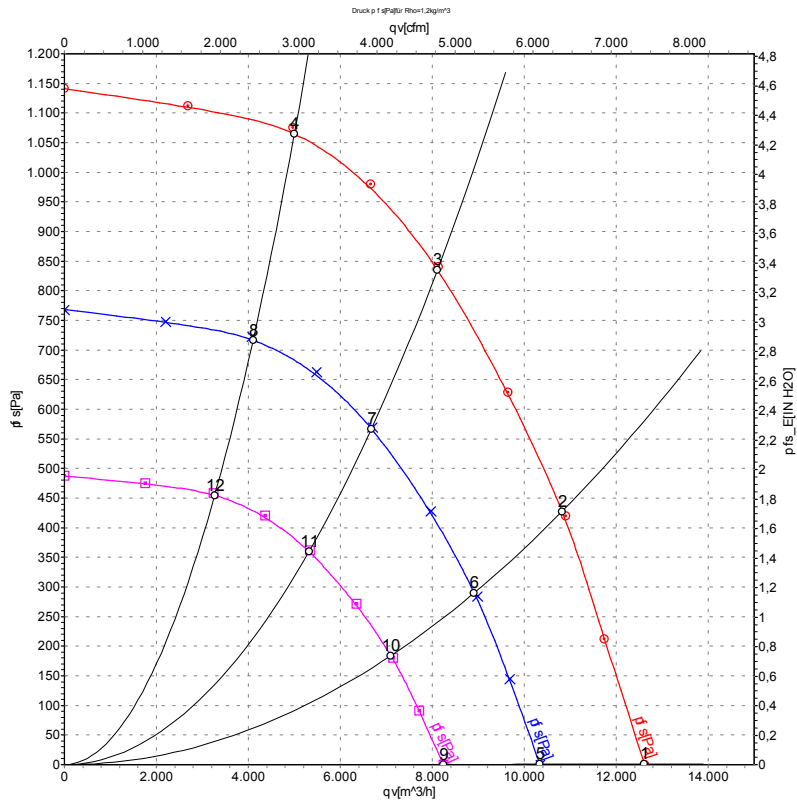

Measurement: LU-128476

Air performance measured as per ISO 5801  
 Installation category A. For detailed  
 information on the measuring set-up, please  
 contact ebm-papst. Suction-side noise  
 levels:  $LwA$  measured as per ISO 13347 /  
 $LpA$  measured with 1m distance to fan axis.  
 The values given are valid under the  
 measuring conditions mentioned above and  
 may vary according to the actual installation  
 situation. With any deviation from the  
 standard set-up, the specific values have to  
 be checked and reviewed with the unit  
 installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m³/h           | Pa              |
| 1  | 400 | 50 | 1780              | 1985            | 3.09 | 87                | 94                | 99                 | 12610          | 0               |
| 2  | 400 | 50 | 1780              | 2530            | 3.90 | 81                | 89                | 93                 | 10820          | 435             |
| 3  | 400 | 50 | 1780              | 2825            | 4.30 | 76                | 83                | 88                 | 8110           | 840             |
| 4  | 400 | 50 | 1780              | 2692            | 4.14 | 78                | 85                | 90                 | 5000           | 1075            |
| 5  | 400 | 50 | 1475              | 1094            | 1.70 | 83                | 90                | 95                 | 10340          | 0               |
| 6  | 400 | 50 | 1475              | 1411            | 2.18 | 77                | 84                | 89                 | 8910           | 294             |
| 7  | 400 | 50 | 1475              | 1602            | 2.47 | 72                | 79                | 84                 | 6680           | 572             |
| 8  | 400 | 50 | 1475              | 1484            | 2.28 | 74                | 80                | 86                 | 4100           | 722             |
| 9  | 400 | 50 | 1175              | 553             | 0.86 | 78                | 85                | 90                 | 8240           | 0               |
| 10 | 400 | 50 | 1175              | 714             | 1.10 | 72                | 80                | 84                 | 7100           | 187             |
| 11 | 400 | 50 | 1175              | 810             | 1.25 | 67                | 74                | 79                 | 5320           | 363             |
| 12 | 400 | 50 | 1175              | 750             | 1.15 | 69                | 75                | 81                 | 3265           | 458             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
 q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase