

## ASIA PACIFIC SHENGRUI LIMITED

Phone +00852 56261528

info@apacfan.com

www.apacfan.com



## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G560-RB31-71    |            |
| Motor                    | M3G150-IF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed                    | min <sup>-1</sup> | 1650       |
| Power input              | W                 | 2900       |
| Current draw             | A                 | 4.43       |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 55         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | Yes    |
| Specific ratio*       | 1.01   |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

|                                |                   | Actual | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | %                 | 66.5   | 52.3         | 56.3         |
| Efficiency grade N             |                   | 72.2   | 58           | 62           |
| Power input $P_{ed}$           | kW                | 2.85   |              |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 9375   |              |              |
| Pressure increase $p_{fs}$     | Pa                | 690    |              |              |
| Speed n                        | min <sup>-1</sup> | 1650   |              |              |


Data definition with optimum efficiency. LU-147559  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



## Technical features


|   |   |
|---|---|
| <b>Mass</b>   | 42.6 kg   |
| <b>Size</b>   | 560 mm  |
| <b>Surface of rotor</b>   | Coated in black   |
| <b>Material of electronics housing</b>                                    | Die-cast aluminium  |
| <b>Material of impeller</b>   | PP plastic  |
| <b>Material of mounting plate</b>   | Sheet steel, galvanised   |
| <b>Material of support bracket</b>  | Steel, coated in black  |
| <b>Material of inlet nozzle</b>   | Sheet steel, galvanised   |
| <b>Number of blades</b>   | 6   |
| <b>Direction of rotation</b>  | Clockwise, seen on rotor  |
| <b>Type of protection</b>   | IP 54   |
| <b>Insulation class</b>   | "F"   |
| <b>Humidity class</b>   | F4-1  |
| <b>Max. permissible ambient motor temp. (transp./ storage)</b>            | +80 °C  |
| <b>Min. permissible ambient motor temp. (transp./storage)</b>             | -40 °C  |
| <b>Mounting position</b>  | Refer to product drawing  |
| <b>Condensate discharge holes</b>   | Rotor-side  |
| <b>Operation mode</b>   | S1  |
| <b>Motor bearing</b>  | Ball bearing  |
| <b>Technical features</b>   | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- External 24 V input (programming)</li> <li>- External release input</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limit</li> <li>- PFC, passive</li> <li>- RS485 MODBUS RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| <b>EMC interference immunity</b>  | Acc. to EN 61000-6-2 (industrial environment)   |
| <b>EMC interference emission</b>  | Acc. to EN 55022 (Class A, industrial environment)  |
| <b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b> | <= 3.5 mA   |
| <b>Electrical leads</b>   | Via terminal box  |
| <b>Motor protection</b>   | Reverse polarity and locked-rotor protection  |
| <b>Protection class</b>   | I (if protective earth is connected by customer)  |
| <b>Product conforming to standard</b>                                     | EN 61800-5-1; CE  |
| <b>Approval</b>   | EAC   |

Product drawing

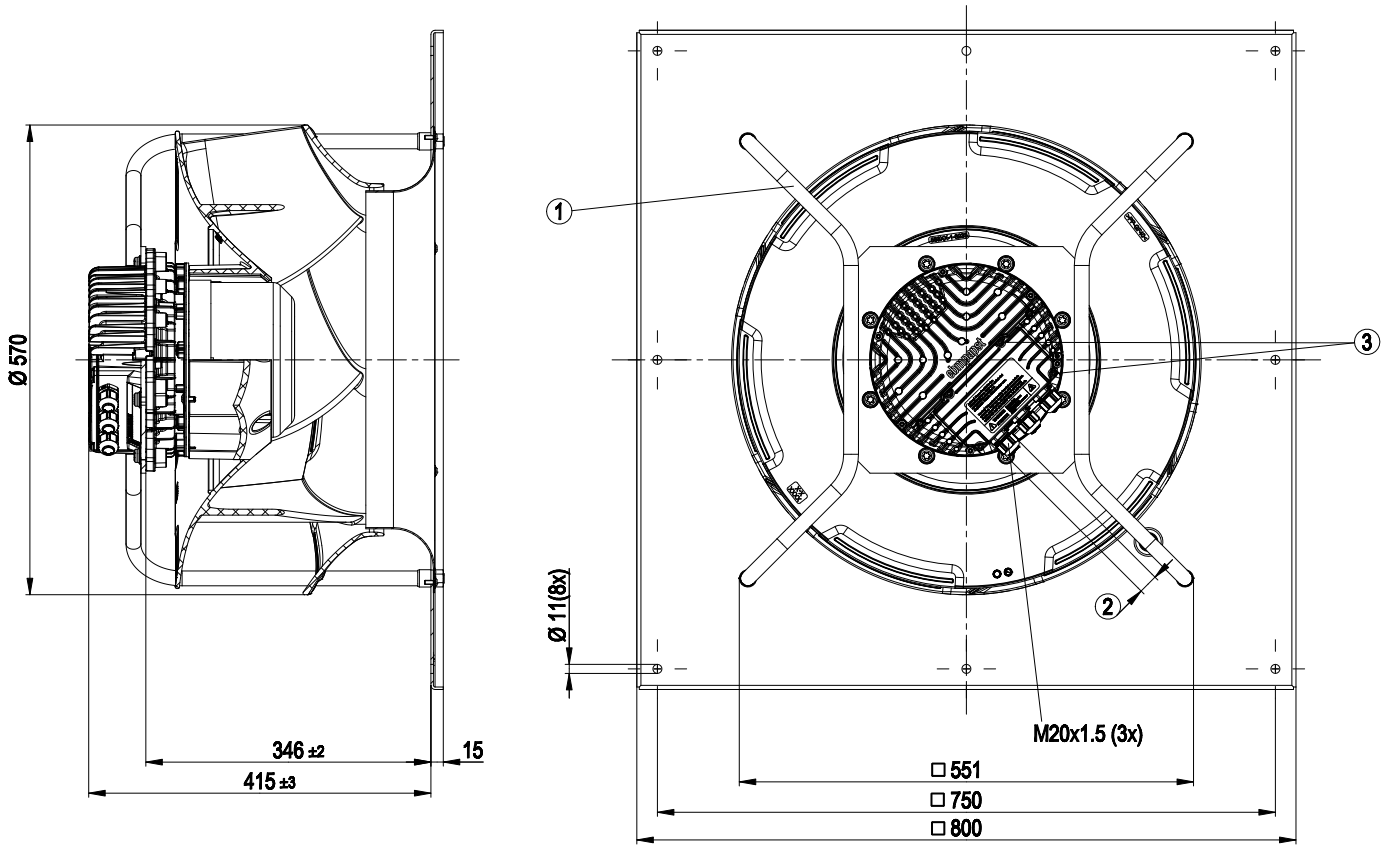


|   |  |
|---|--|
| 1 | Mounting position: shaft horizontal (install the support struts only vertically as shown in the view!) or rotor on bottom; rotor on top on request |
| 2 | Cable diameter: min. 4 mm, max. 10 mm; tightening torque: $4 \pm 0.6$ Nm   |
| 3 | Tightening torque $3.5 \pm 0.5$ Nm   |

## Connection screen

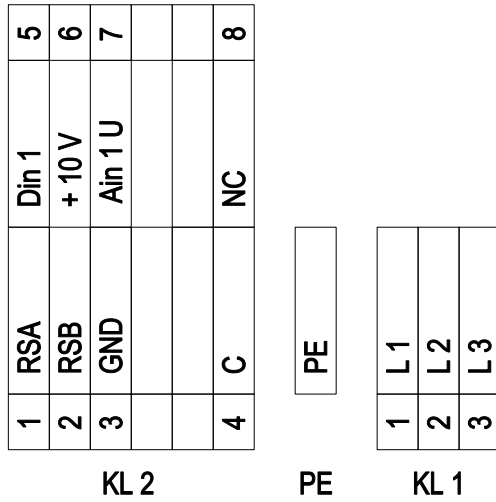

| No.  | Conn. | Designation | Function / assignment  |
|------|-------|-------------|--|
| KL 1 | 1     | L1          | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz  |
| KL 1 | 2     | L2          | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz  |
| KL 1 | 3     | L3          | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz  |
| PE   |       | PE          | Earth connection, PE connection  |
| KL 2 | 1     | RSA         | Bus connection RS-485, RSA, MODBUS RTU; SELV   |
| KL 2 | 2     | RSB         | Bus connection RS-485, RSB, MODBUS RTU; SELV   |
| KL 2 | 3     | GND         | Signal ground for control interface; SELV  |
| KL 2 | 4     | C           | Status relay; floating status contact; changeover contact; common connection; contact rating 250 VAC / 2 A (AC1)   |
| KL 2 | 5     | Din1        | Digital input 1 enabling of electronics,<br>enabling: open pin or applied voltage 5-50 VDC<br>disabling: bridge to GND or applied voltage <1 VDC<br>reset function: triggers software reset after a level change to <1 V; SELV |
| KL 2 | 6     | + 10 V      | Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometer), SELV  |
| KL 2 | 7     | Ain1 U      | Analogue input 1 (set value) 0-10 V, Ri = 100 kΩ, parametrisable curve, only usable as alternative to input Ain1 I SELV  |
| KL 2 | 8     | NC          | Status relay, floating status contact; break for failure   |

## Charts: Air flow 50 Hz

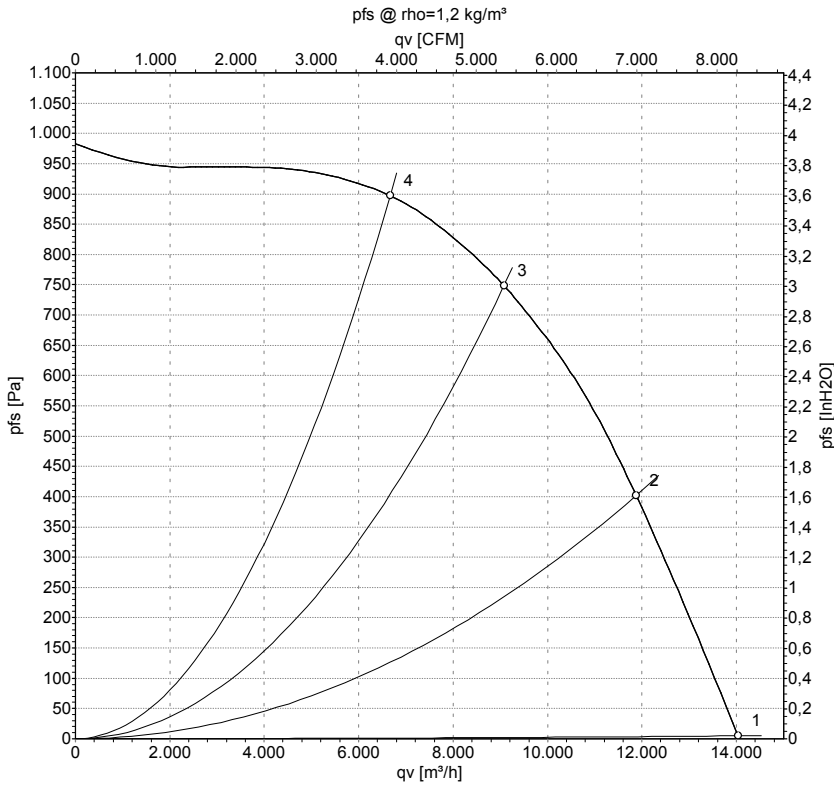

Measurement: LU-147559

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>ed</sub> | I    | LwA <sub>in</sub> | qv                | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | m <sup>3</sup> /h | Pa              |
| 1 | Y     | 400 | 50 | 1650              | 2010            | 3.10 | 87                | 14040             | 0               |
| 2 | Y     | 400 | 50 | 1650              | 2630            | 4.10 | 81                | 11900             | 400             |
| 3 | Y     | 400 | 50 | 1650              | 2900            | 4.43 | 77                | 9100              | 750             |
| 4 | Y     | 400 | 50 | 1650              | 2770            | 4.30 | 80                | 6670              | 900             |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LwA<sub>in</sub> = Sound power level inlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase

