

D2D146-BG03-17

# AC centrifugal fan

forward-curved, dual-intake

with housing (flange)

## Nominal data

<b>Type</b>	D2D146-BG03-17		
<b>Motor</b>	M2D068-GA		
Phase		3~	3~
Nominal voltage	VAC	400	440
Nominal voltage range	VAC	380 .. 440	380 .. 440
Wiring		Y	Y
Frequency	Hz	50	50
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min <sup>-1</sup>	2580	2650
Power consumption	W	350	430
Current draw	A	0.6	0.65
Min. back pressure	Pa	290	300
Min. back pressure	in. wg	1.16	1.2
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	60	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	35.6	33.5	09 Power consumption $P_e$	kW	0.22
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	705
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	416
04 Efficiency grade N		46	44	10 Speed (rpm) n	min <sup>-1</sup>	2750
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-110559



D2D146-BG03-17

# AC centrifugal fan

forward-curved, dual-intake

with housing (flange)

## Technical description


<b>Weight</b>	5.6 kg
<b>Size</b>	146 mm
<b>Motor size</b>	68
<b>Rotor surface</b>	Painted black
<b>Impeller material</b>	Sheet steel, painted black
<b>Housing material</b>	Sheet steel, galvanized
<b>Guard grille material</b>	Steel, coated with white-aluminum plastic (RAL 9006)
<b>Motor suspension</b>	Motor mounted with brackets on one side
<b>Direction of rotation</b>	Counterclockwise, viewed toward rotor
<b>Degree of protection</b>	IP55
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	H1+
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Shaft horizontal
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) with basic insulation
<b>With cable</b>	Axial
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 60034-1; EN 60204-1; CE
<b>Approval</b>	CSA C22.2 No. 100; CCC; UL 1004-1



# AC centrifugal fan


forward-curved, dual-intake  
with housing (flange)

## Product drawing

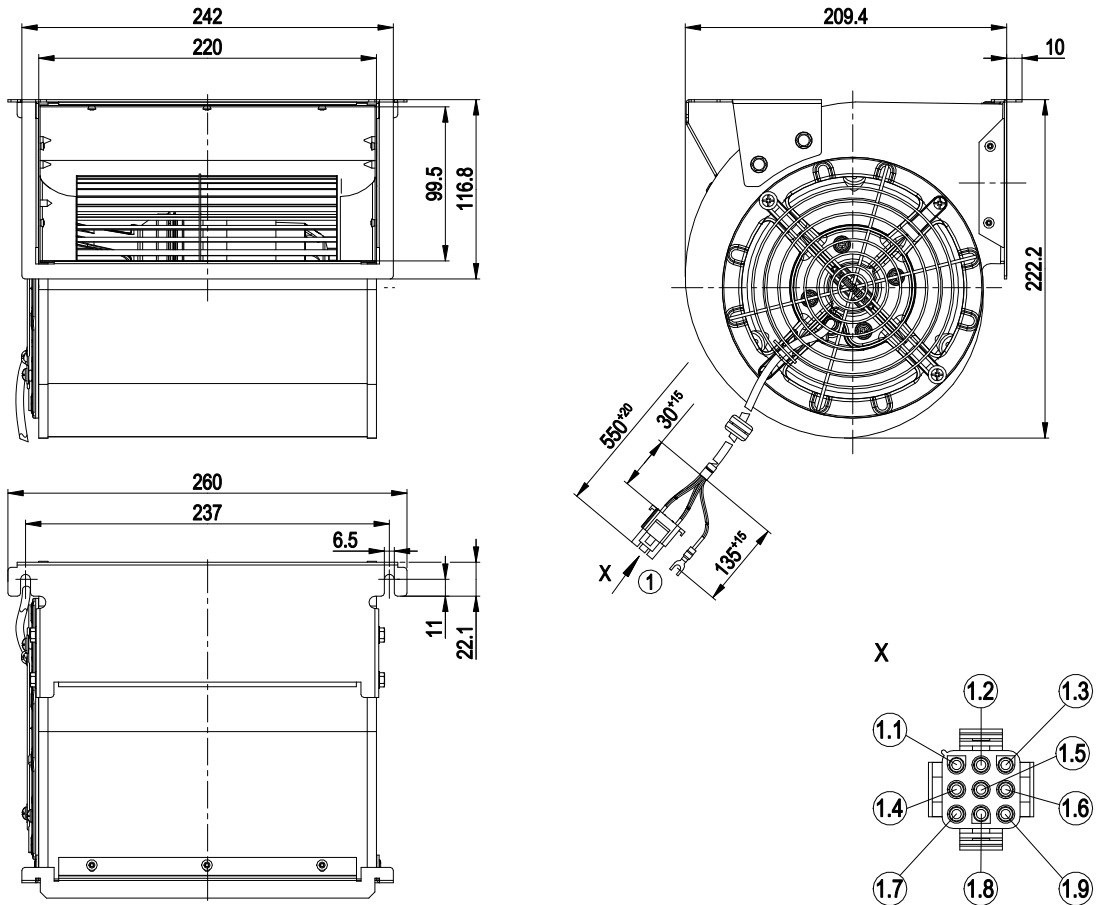

1	Cable PFA AWG20
	9-pole connector housing TE 350720-1, 5x plug pin TE 926886-1, 1x spade terminal TE 130517-0
1.1	TOP (gray)
1.2	not used
1.3	V1 (blue)
1.4	TOP (gray)
1.5	not used
1.6	not used
1.7	U1 (black)
1.8	not used
1.9	W1 (brown)
	Accessory parts, included separately:
	Guard grill
	Tapping screw assembly (3x), tightening torque 1.6±0.2 Nm
	Zipped plastic bag

## Connection diagram

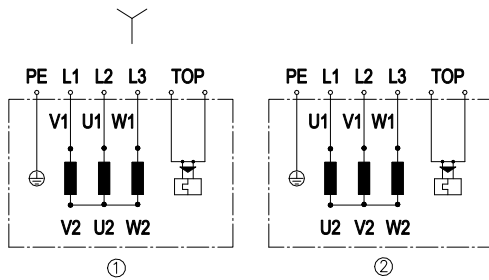


Change of rotation direction by reversing two phases

	Three-phase motor
Y	Star connection
1	Counterclockwise operation
L1	= V1 = blue
L2	= U1 = black
L3	= W1 = brown
2	Clockwise operation
L1	= U1 = black
L2	= V1 = blue
L3	= W1 = brown
PE	green/yellow
TOP	2x gray

# AC centrifugal fan

forward-curved, dual-intake  
with housing (flange)

## Curves: Air performance 50 Hz

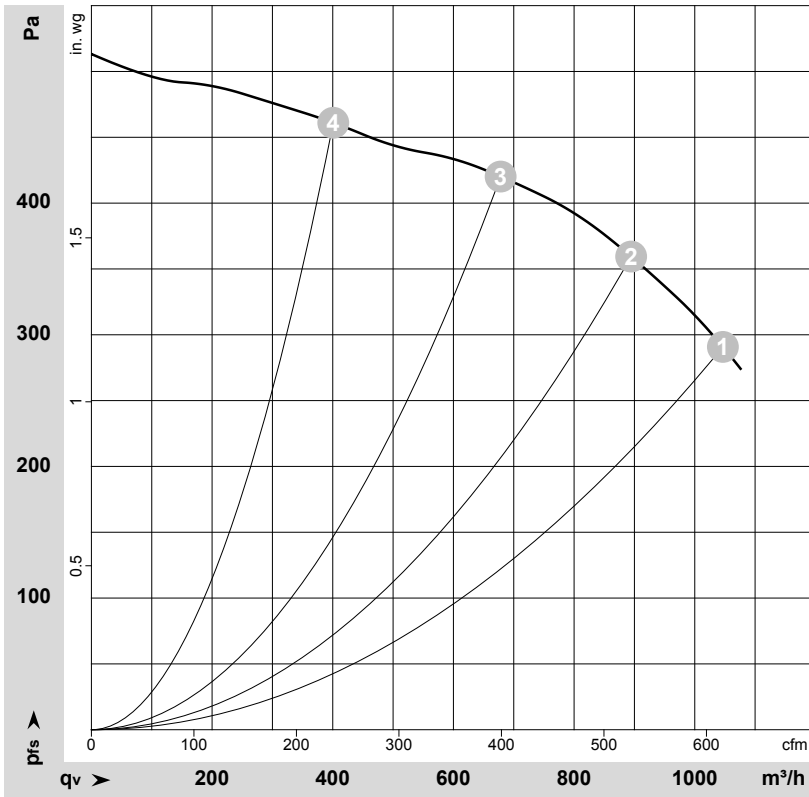

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-110559-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	Pe	I	qv	Pfs	qv	Pfs
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	in. wg
1	Y	400	50	2580	350	0.60	1045	290	615	1.16
2	Y	400	50	2665	287	0.53	895	360	525	1.45
3	Y	400	50	2755	224	0.46	680	420	400	1.69
4	Y	400	50	2830	168	0.41	400	460	235	1.85

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · Pe = Power consumption · I = Current draw · qv = Air flow · Pfs = Pressure increase

