



The engineer's choice

ebmpapst

6314 H

INDEX

| | | |
|----------|---|----------|
| 1 | General | 3 |
| 2 | Mechanics | 3 |
| 2.1 | General..... | 3 |
| 2.2 | Connections..... | 3 |
| 3 | Operating Data | 3 |
| 3.1 | Operating Data - Electrical Interface - Input..... | 3 |
| 3.2 | Electrical Operating Data | 4 |
| 3.3 | Operating Data - Electrical Interface -Output | 4 |
| 3.4 | Electrical Features..... | 4 |
| 3.5 | Aerodynamic..... | 8 |
| 3.6 | Sound Data..... | 8 |
| 4 | Environment | 8 |
| 4.1 | General..... | 8 |
| 4.2 | Climatic requirements*) | 8 |
| 5 | Safety | 9 |
| 5.1 | Electrical Safety..... | 9 |
| 5.2 | Approval Tests | 9 |

1 General

| | | |
|---------------------------------------|------------------------|--|
| Fan type | Fan | |
| Rotational direction looking at rotor | counterclockwise | |
| Airflow direction | Air outlet over struts | |
| Bearing system | Ball bearing | |
| Mounting position | any | |


2 Mechanics

2.1 General

| | | |
|---|--|--|
| Depth | 51,0 mm | |
| Diameter | 172,0 mm | |
| Weight | 0,825 kg | |
| Housing material | Metal | |
| Impeller material | Plastic | |
| Max. torque when mounted across both mounting flanges Screw size | wire outlet corner: 600 Ncm remaining corners: 600 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer | |

2.2 Connections

| | | |
|-----------------------|-------------|--|
| Electrical connection | Wires | |
| Length of lead wire | L = 365 mm | |
| Tolerance | +/- 10,0 mm | |
| Length of tube | S = 10 mm | |
| Tolerance | +/- 2,0 mm | |
| Wire gauge (AWG) | 22 | |
| Insulation diameter | 1,7 mm | |
| Contact | see drawing | |

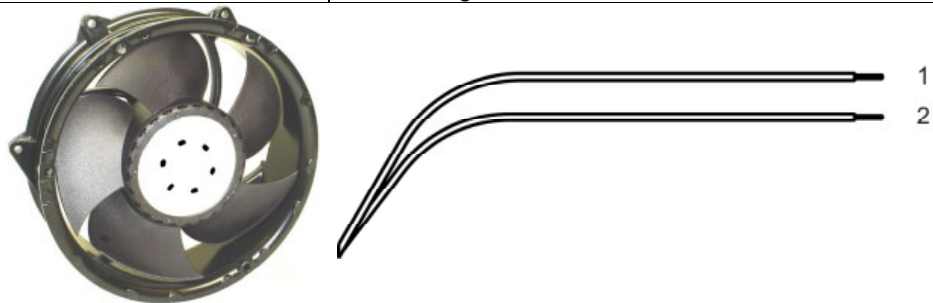

| | Colour | Operation |
|--------|--------|-----------|
| Wire 1 | red | + UB |
| Wire 2 | blue | - GND |

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

| | |
|---------------|------|
| Control input | None |
|---------------|------|

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

| Features | Condition | Symbol | Values | | |
|--|--|--------|-------------|-------------|-------------|
| Voltage range | $\Delta p = 0$ | U | 16,0 V | | 30,0 V |
| Nominal voltage | $\Delta p = 0$ | U_N | | 24,0 V | |
| Power consumption | $\Delta p = 0$ | P | 16,5 W | 31,0 W | 32,0 W |
| Tolerance | 0001 | | +/- 15,0 % | +/- 10,0 % | +/- 10,0 % |
| Current consumption | $\Delta p = 0$ | I | 1.040 mA | 1.300 mA | 1.050 mA |
| Tolerance | 0001 | | +/- 15,0 % | +/- 10,0 % | +/- 10,0 % |
| Speed | $\Delta p = 0$ | n | 3.900 1/min | 5.000 1/min | 5.000 1/min |
| Tolerance | 0001 | | +/- 10,0 % | +/- 5,0 % | +/- 5,0 % |
| Starting current consumption | | | | 1.900 mA | |
| recommended slew rate of the input voltage | $\Delta U / \Delta t = 100 \text{ V / sec.}$ | | | | |
| max. allowed input voltage ripple (within the specified voltage range) | +/- 5 % | | | | |
| max. allowed input voltage ripple (within the specified voltage range) | $\geq 50 \text{ Hz}$ | | | | |

Note:

No inrush current at U_{nom} means:


The internal electrolytic capacitor 470uF/35V has no resistor or inrush current limitation, essentially the power supply and the type and length of the connecting cable is limiting the Inrush current.

3.3 Operating Data - Electrical Interface -Output


| | |
|------------|------|
| Tacho type | None |
| Alarm type | None |

3.4 Electrical Features

| | | |
|------------------------------------|-------------------------|--|
| Electronic function | Speed-Controlled | |
| Reversed polarity protection | Rectifying diode | |
| Max. residual current at U_N | $I_F \leq 5 \text{ mA}$ | |
| Locked rotor protection | Auto restart | |
| Locked rotor current at U_N | | |
| Clock signal t3/t4 at locked rotor | Typical: 0,5 s / 7,0 s | |

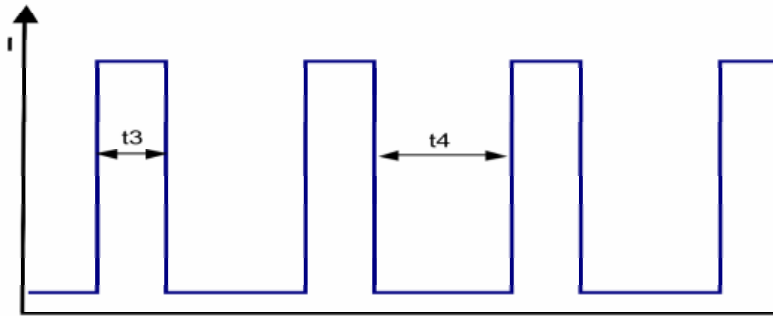


Start-up current @ 48 V (I = 500mA/div ; t = 2s/div)

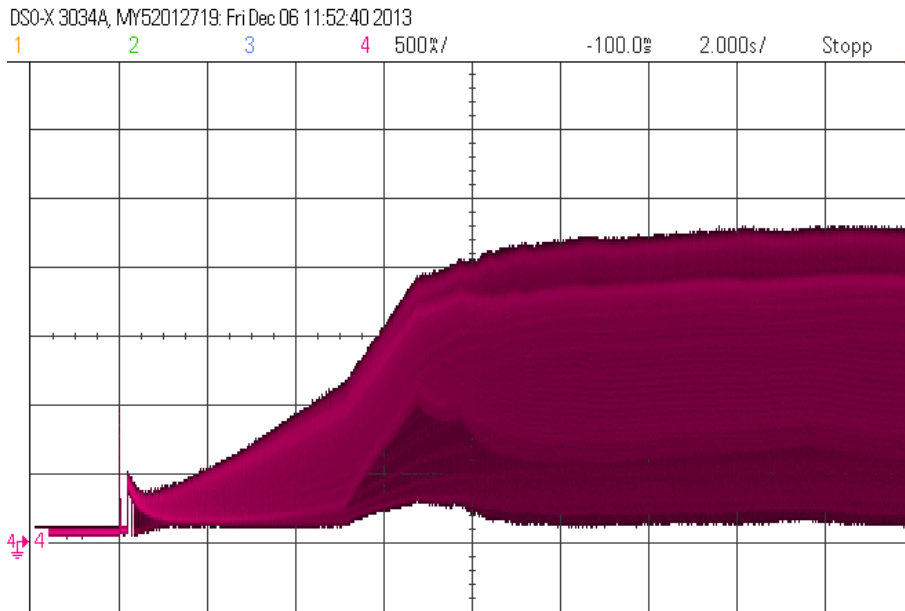


Running current @ 24 V (I = 500mA/div ; t = 2ms/div)

DSO-X 3034A, MY52012719: Fri Dec 06 11:53:45 2013

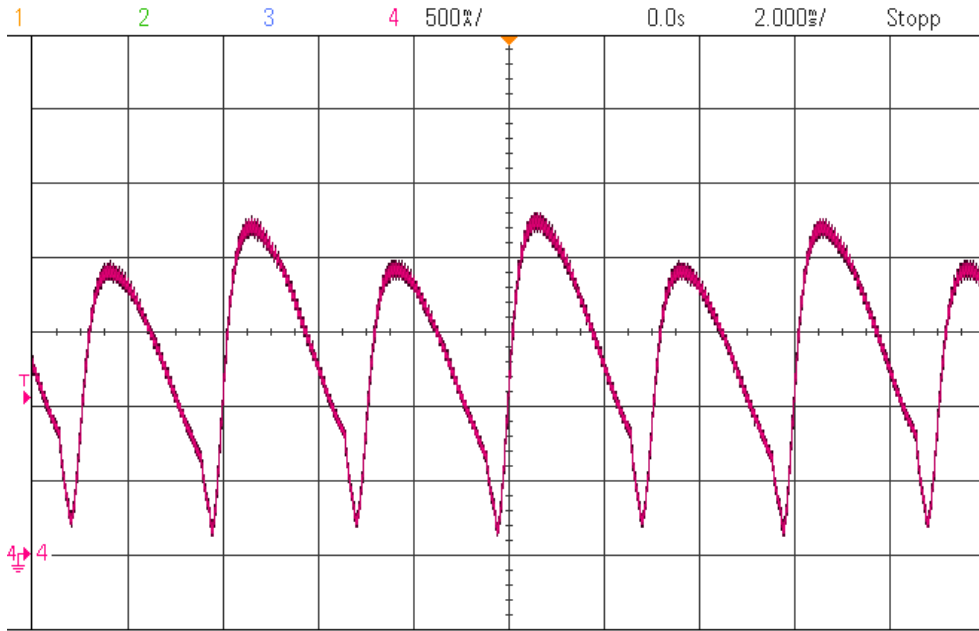

Locked rotor current @ 24 V (I = 500mA/div ; t = 500ms/div)


DSO-X 3034A, MY52012719: Fri Dec 06 11:48:51 2013

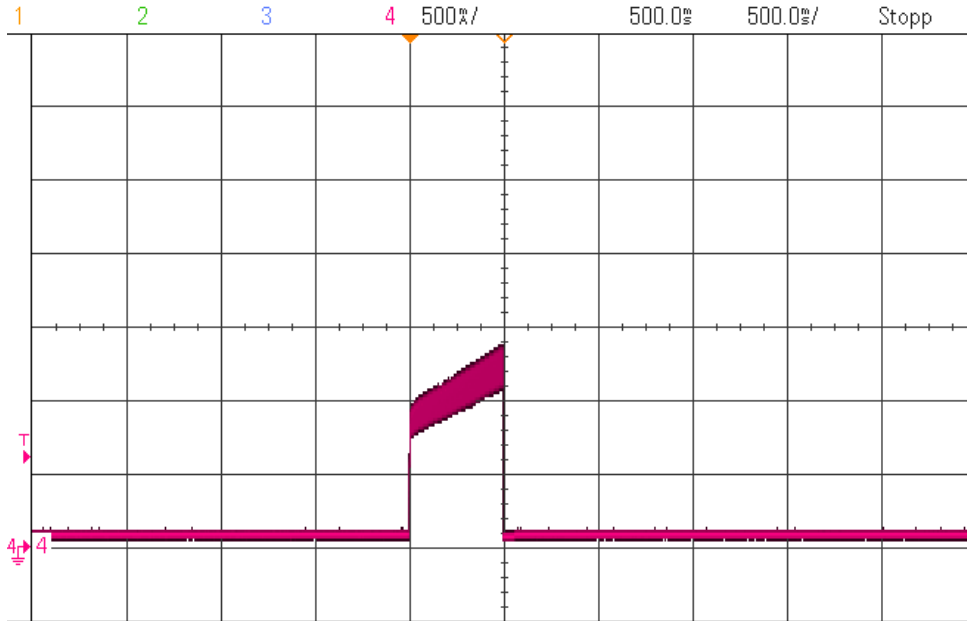

Locked rotor current @ 16 V (I = 500mA/div ; t = 500ms/div)

DSO-X 3034A, MY52012719: Fri Dec 06 11:51:30 2013


1 2 3 4 500% / 500.0% 500.0% / Stopp

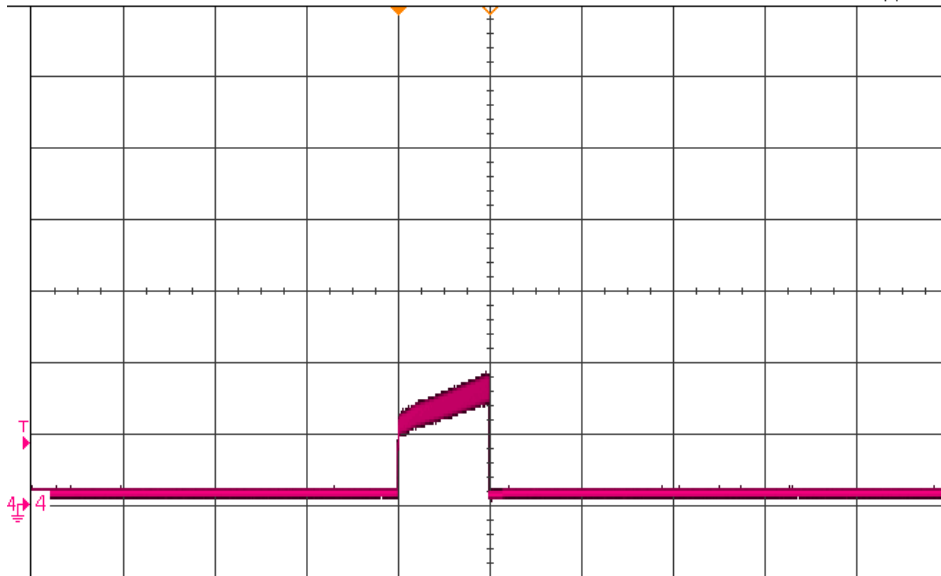

Locked rotor current @ 30 V (I = 500mA/div ; t = 500ms/div)

DSO-X 3034A, MY52012719: Fri Dec 06 11:48:08 2013

1 2 3 4 500% / 500.0% 500.0% / Stopp

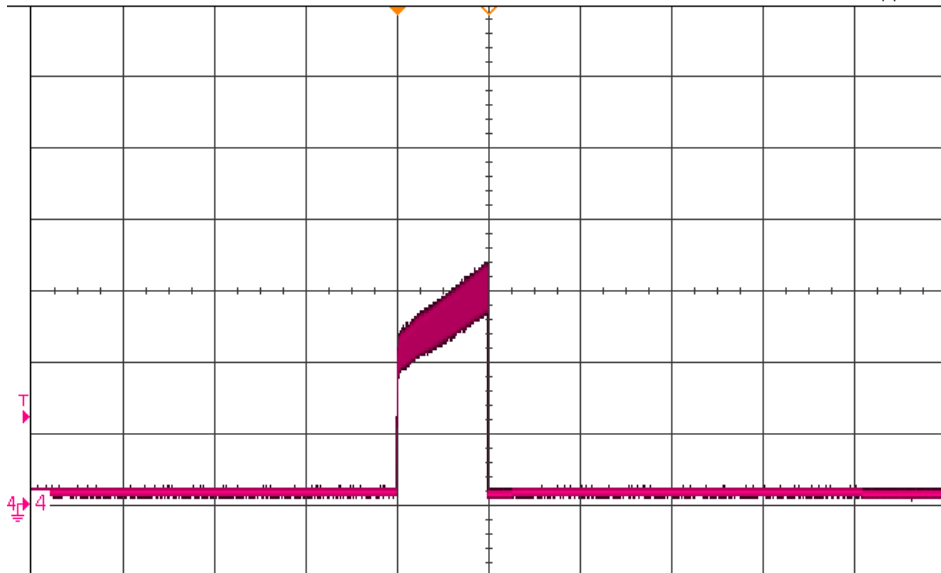

**Internal Fuse:
Littlefuse NANO2(R) FUSE; Very fast acting 451 Series; 4 A (Art.-Nr.: 451004)**

3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
 Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
 In the intake and outlet area should not be any solid obstruction within 0,5 m.
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

| | | |
|---|-------------------------|--|
| 5.000 1/min at free air flow | | |
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | 545,0 m ³ /h | |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | 410 Pa | |

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of L_p(A) < 5 dB(A)
 For further measurement conditions see section 3.5

a.) Operation condition:

| | | |
|---|----------------------------------|--|
| 5.000 1/min at free air flow | | |
| Optimal operating point | 450,0 m ³ /h @ 117 Pa | |
| Sound power level at the optimal operating point | 6,9 bel(A) | |
| Sound pressure level at free air flow, measured in rubber bands | 58,0 dB(A) | |

4 Environment

4.1 General

| | | |
|--|--------|--|
| Min. permitted ambient temperature TU min. | -20 °C | |
| Max. permitted ambient temperature TU max. | 65 °C | |
| Min. permitted storage temperature TL min. | -40 °C | |
| Max. permitted storage temperature TL max. | 80 °C | |

4.2 Climatic requirements *)

| | | |
|-----------------------|---|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days | |
| Water exposure | None | |
| Dust requirements | None | |
| Salt fog requirements | None | |

*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. Please require severity levels and specification parameters from the responsible development departments

5 Safety




5.1 Electrical Safety

| | | |
|---|--|--|
| Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | 500 VAC / 1 Min. 500 VAC / 1 Sec. | |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | RI > 10 MOhm | |
| clearance / creepage distance | 1,0 mm / 1,2 mm | |
| Protection class | III | |

5.2 Approval Tests

| | | |
|-----|---|---|
| CE | EC Declaration of Conformity | Yes |
| EAC | Eurasian Conformity | Yes |
| UL | Underwriters Laboratories | Yes / UL audited by CSA according to UL507, Electric Fans |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association | Yes / C22.2 No. 113 Fans and Ventilators |
| CCC | China Compulsory Certification | No |

Drawing of this bearing, and details, is given for the use of manufacturers of the bearing housing, and not for the use of the bearing manufacturer. It is not intended to be used as a basis for the design of the bearing housing. It is not intended to be used as a basis for the design of the bearing housing.

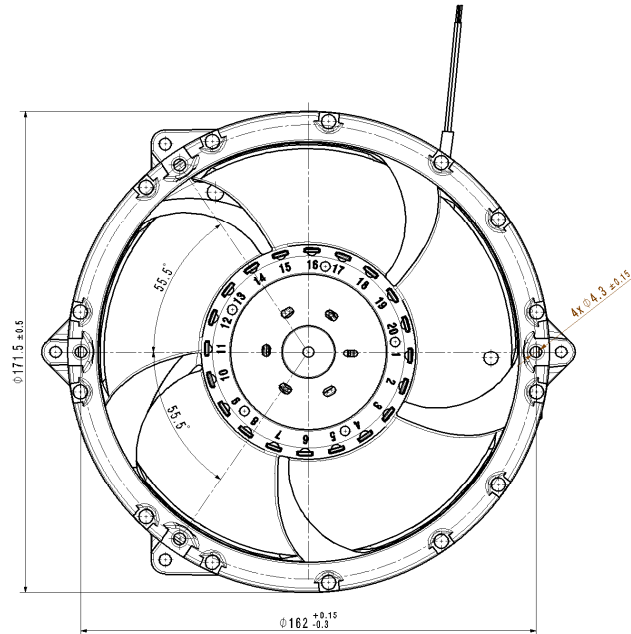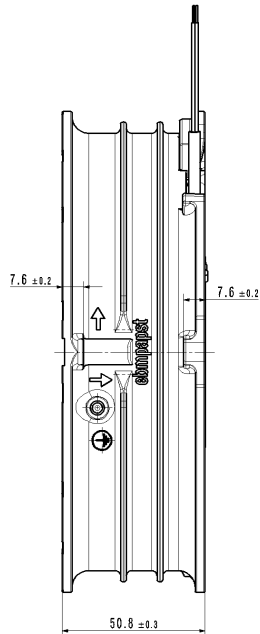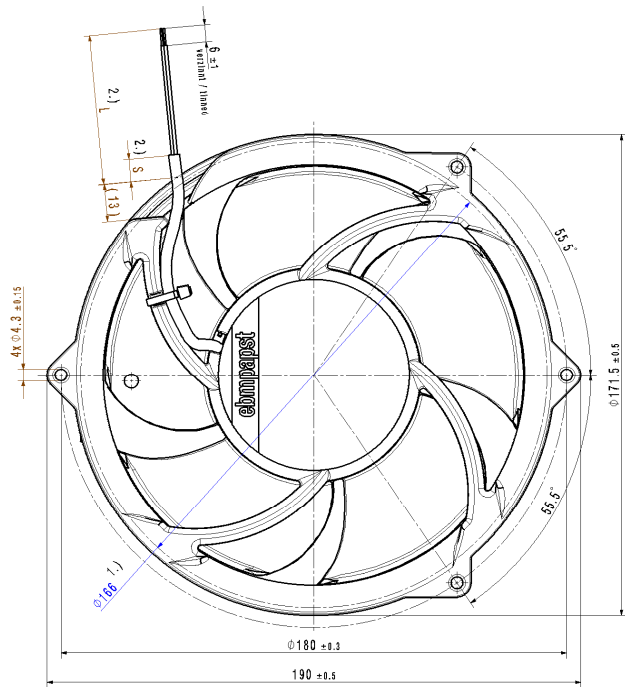

- 1.) Maße aus Montageausschnitt
- 2.) Anzahl und Länge der Litzen/Schlauch siehe Produktspezifikation
- 3.) Nur wenn in Stückliste enthalten

- Axialspiel der Kugellager mit Feder spielfrei gelagert

- 1.) measures of mounting cut out
- 2.) length an number of wires/tube see product specification
- 3.) only if it is included in bill of material

- ball bearing without clearance by a pre-load spring

| | | | | | |
|--------------------------------------|---------------------|--------------------------------|--------------------------------|------------------------|------------------|
| DF-Modul-Code | AWG, V, / Orange | DF-Modul-Code DF-Modul-Code | DF-Modul-Code DF-Modul-Code | Bestellort / Material: | Stamm- Nummer |
| | | | | DF-Modul-Code | DF-Modul-Code |
| Tubenlänge / Tubenlänge: | | | | DF-Modul-Code | DF-Modul-Code |
| Abgemessene Länge / gem. Tubenlänge: | | | | DF-Modul-Code | DF-Modul-Code |
| | | | | DF-Modul-Code | DF-Modul-Code |
| ebmpapst www.ebmpapst.com | | | | DF-Modul-Code | DF-Modul-Code |