

EC axial fan - HyBlade

sickled blades (S series)

Wall ring with guard grille

ASIA PACIFIC SHENGRUI LIMITED

Phone +00852 56261528

info@apacfan.com

www.apacfan.com



Nominal data

Type	W3G630-GE55-21	
Motor	M3G112-GA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed	min ⁻¹	1020
Power input	W	730
Current draw	A	3.2
Max. back pressure	Pa	150
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2015
Overall efficiency η_{es}	%	44.8	32.6
Efficiency grade N		52.2	40
Power input P_{ed}	kW	0.68	
Air flow q_v	m ³ /h	8245	
Pressure increase p_{fs}	Pa	123	
Speed n	min ⁻¹	1020	

Data definition with optimum efficiency. LU-157258
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



EC axial fan - HyBlade

sickled blades (S series)

Wall ring with guard grille

Technical features

Mass	14.85 kg
Size	630 mm
Surface of rotor	Coated in black
Material of terminal box	PP plastic
Material of electronics housing	Die-cast aluminium, coated in black
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Output limit - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	EAC
Remark	Standard conformity as per EN 60335-1 in preparation




EC axial fan - HyBlade

sickled blades (S series)

Wall ring with guard grille

Product drawing

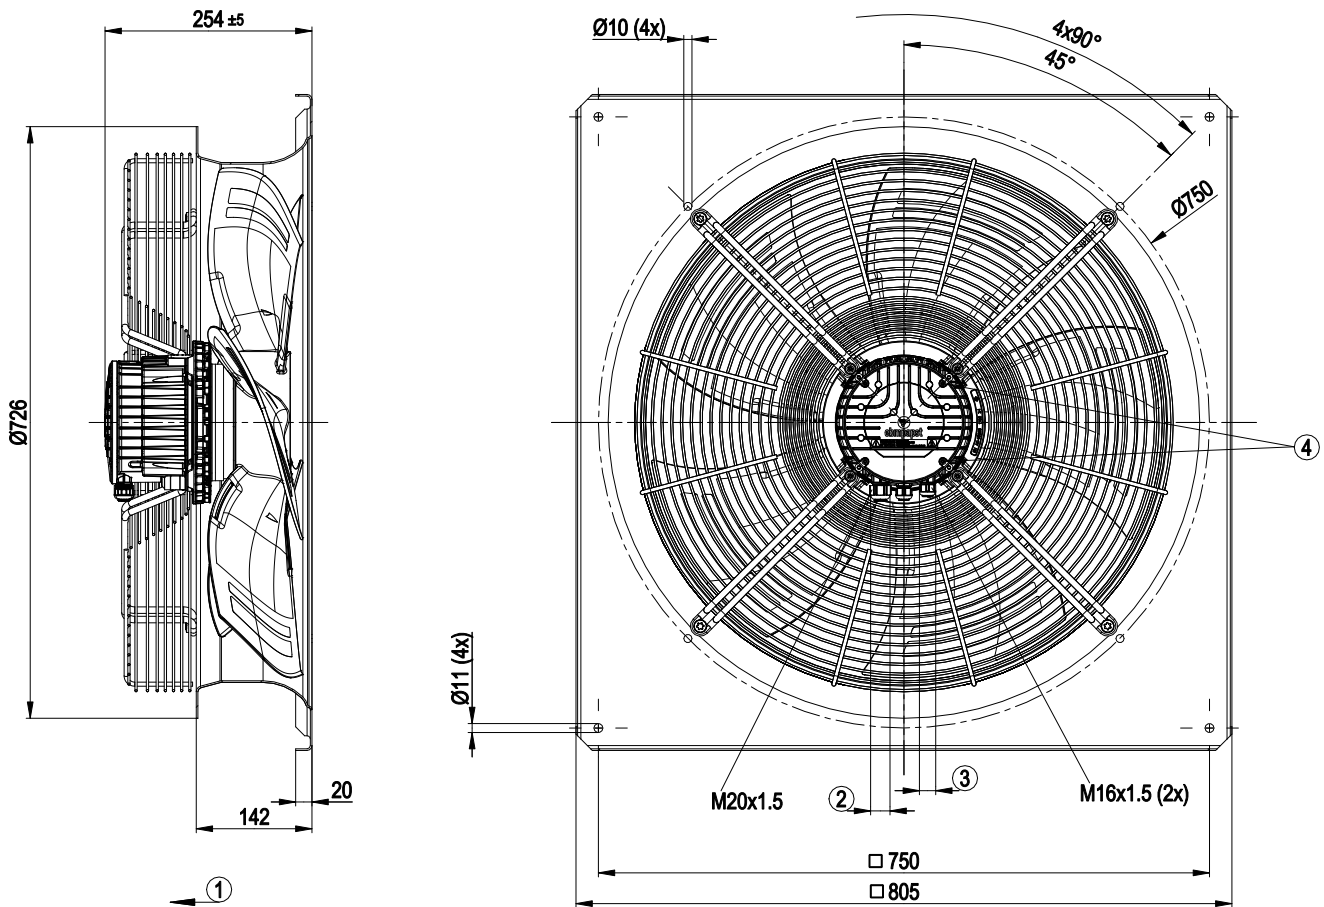

1	Direction of air flow "V"
2	Cable diameter min. 8 mm, max. 12 mm, tightening torque 2.5±0.4 Nm
3	Cable diameter min. 6 mm, max. 10 mm, tightening torque 2.5±0.4 Nm Cable diameter min. 4 mm, max. 7 mm, tightening torque 2.5±0.4 Nm (use must be made of sealing ring provided)
4	Tightening torque 1.5±0.2 Nm

EC axial fan - HyBlade

sickled blades (S series)

Wall ring with guard grille

Connection screen

PE	PE	N		L	NC	COM	GND	RSA	RSB	0-10 V	+10 V	
1	2	3	4	5	6	7	8	9	10	11	12	


No.	Conn.	Designation	Function / assignment
	1	PE	Protective earth
	2	PE	Protective earth
	3	N	Power supply, neutral conductor
	4	-	not used
	5	L	Power supply, phase
	6	NC	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
	7	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
	8	GND	Signal ground for control interface, SELV
	9	RSA	RS-485 interface for MODBUS, RSA; SELV
	10	RSB	RS-485 interface for MODBUS, RSB; SELV
	11	0-10 V	Analogue input (set value) SELV, 0-10 V, Ri=100kΩ, parametrisable curve
	12	+10 V	Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometer)

EC axial fan - HyBlade

sickled blades (S series)

Wall ring with guard grille

Charts: Air flow 50 Hz

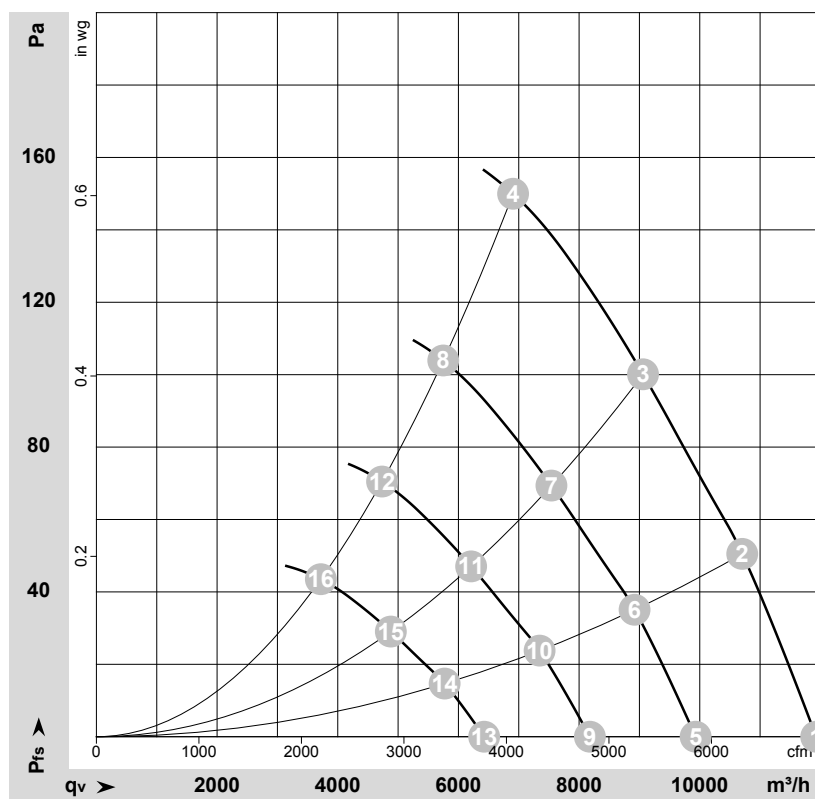

$$\rho = 1,15 \text{ kg/m}^3 \pm 2\%$$

Measurement: LU-157258

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	230	50	1020	463	2.08	69	76	75	11930	0
2	230	50	1020	555	2.47	65	72	71	10705	50
3	230	50	1020	648	2.86	63	70	69	9060	100
4	230	50	1020	730	3.20	66	73	73	6905	150
5	230	50	850	267	1.20	64	71	71	9930	0
6	230	50	850	321	1.43	60	67	66	8920	36
7	230	50	850	374	1.65	58	65	64	7540	70
8	230	50	850	421	1.85	61	69	69	5750	104
9	230	50	700	149	0.67	59	66	66	8180	0
10	230	50	700	179	0.80	55	62	62	7345	24
11	230	50	700	209	0.92	53	60	60	6210	47
12	230	50	700	235	1.03	57	64	64	4735	70
13	230	50	550	72	0.33	53	60	60	6425	0
14	230	50	550	87	0.39	49	56	56	5770	15
15	230	50	550	101	0.45	47	54	54	4880	29
16	230	50	550	114	0.50	50	58	58	3720	44

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side

qv = Air flow · p_{fs} = Pressure increase

