

R4D250-CG07-05

# AC centrifugal fan

forward curved, single inlet



**ASIA PACIFIC SHENGRUI LIMITED**

Phone +00852 56261528

info@apacfan.com

www.apacfan.com



## Nominal data

<b>Type</b>	<b>R4D250-CG07-05</b>			
<b>Motor</b>	<b>M4D110-GF</b>			
Phase		3~	3~	3~
Nominal voltage	VAC	400	400	480
Connection		Y	Y	Y
Frequency	Hz	50	60	60
Type of data definition		ml	ml	ml
Valid for approval / standard		CE	CE	CE
Speed	min <sup>-1</sup>	1400	1580	1650
Power input	W	750	1170	1240
Current draw	A	1.6	2.0	1.95
Min. back pressure	Pa	0	0	0
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	80	45	45
Starting current	A	10	9.6	

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

## Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

	Actual	Request 2013	Request 2015
Overall efficiency $\eta_{es}$	30	27.5	34.5
Efficiency grade N	39.5	37	44
Power input $P_e$	kW	0.31	
Air flow $q_v$	m <sup>3</sup> /h	1005	
Pressure increase $p_{fs}$	Pa	344	
Speed n	min <sup>-1</sup>	1465	

Data established at point of optimum efficiency




### Technical features

<b>Mass</b>	10 kg
<b>Size</b>	250 mm
<b>Surface of rotor</b>	Cast in aluminium
<b>Material of impeller</b>	Sheet steel, hot-galvanised
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 54
<b>Insulation class</b>	"F"
<b>Humidity class</b>	F3-1
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	-40 °C
<b>Mounting position</b>	Shaft horizontal or rotor on bottom; rotor on top on request
<b>Condensate discharge holes</b>	Rotor-side
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	<= 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) brought out
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 61800-5-1; CE
<b>Approval</b>	GOST; VDE; UL 1004-1; CSA C22.2 Nr.100

# AC centrifugal fan

forward curved, single inlet


## Product drawing

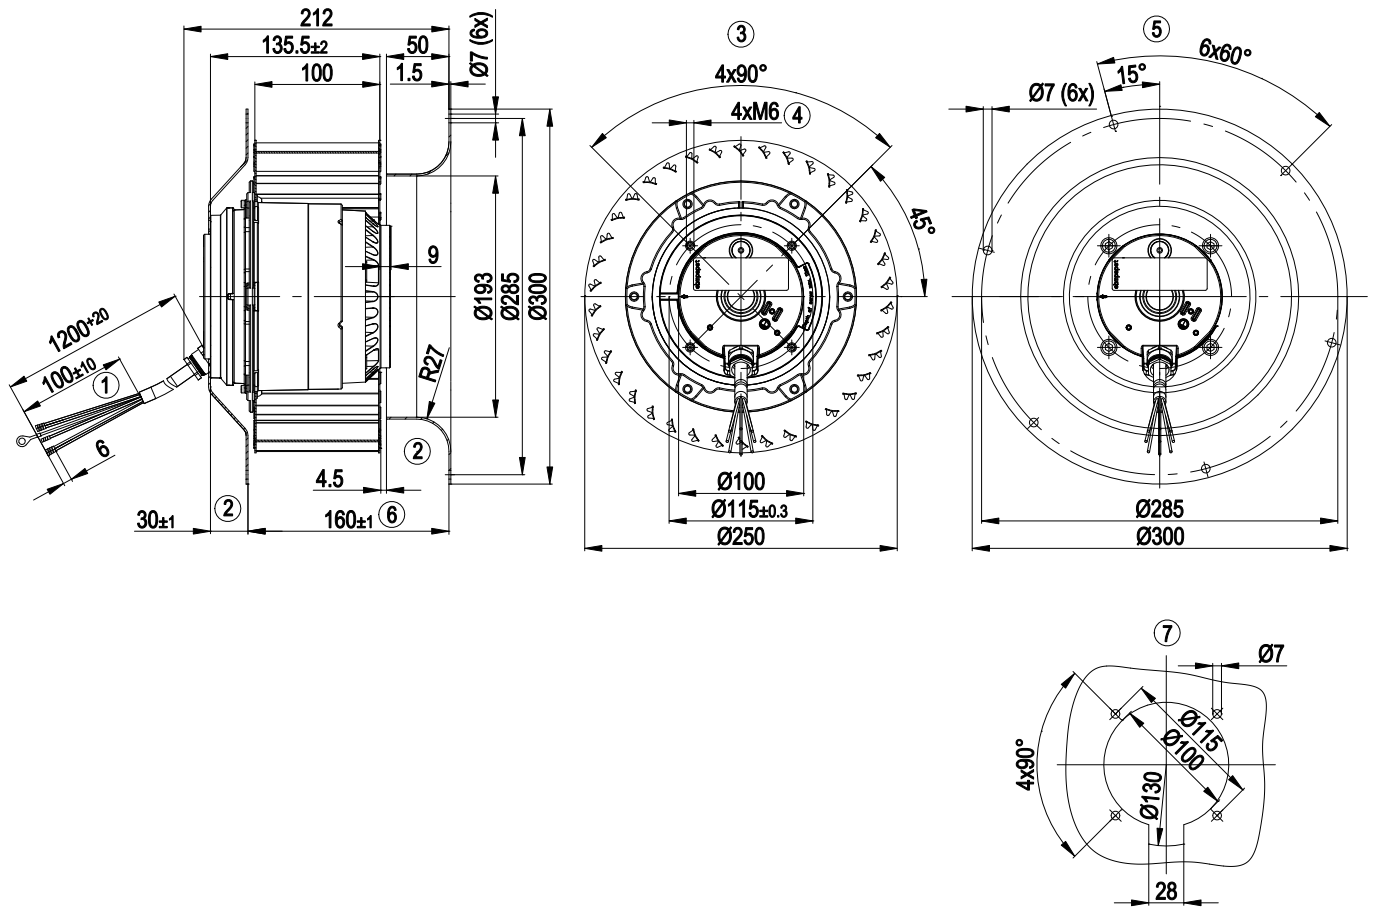

1	Connection line silicone, 5 x brass lead tips and 1 x contact stud crimped
2	Accessory part: Inlet nozzle 25010-2-4013 and flange 94250-2-4017 not included in the standard scope of delivery
3	View without flange
4	Depth of screw max. 12 mm
5	View with flange
6	Housing width
7	Drill pattern for mounting without flange




## Connection screen



Y	Star connection	L1	black	L2	blue
L3	brown	U1	black	V1	blue
W1	brown	U2	green	V2	white
W2	yellow	TOP	2x grey	PE	green/yellow

## Charts: Air flow 50 Hz Y

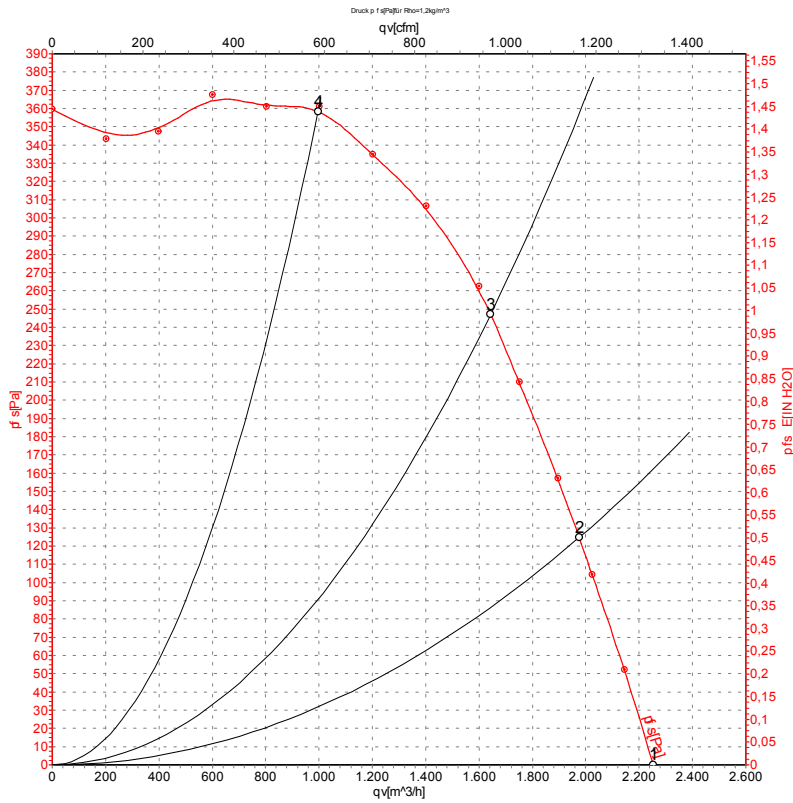

Measurement: LU-74223

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>wA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


## Measured values

	Conn.	U	f	n	P <sub>e</sub>	I	qv	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa
1	Y	400	50	1400	750	1.60	2250	0
2	Y	400	50	1420	629	1.53	1975	125
3	Y	400	50	1440	497	1.40	1645	250
4	Y	400	50	1465	318	1.29	995	360

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase



## Charts: Air flow 60 Hz Y

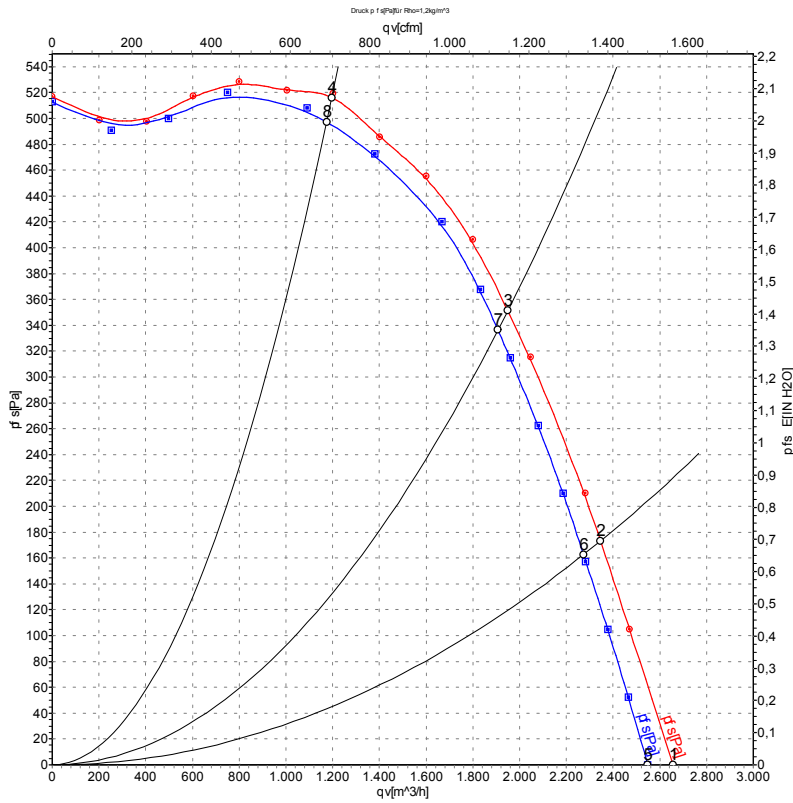

Measurement: LU-74226  
Measurement: LU-74224

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>wA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	Conn.	U	f	n	P <sub>e</sub>	I	L <sub>wA<sub>in</sub></sub>	qv	p <sub>fS</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	m <sup>3</sup> /h	Pa
1	Y	480	60	1650	1240	1.95	90	2650	0
2	Y	480	60	1675	1042	1.75	88	2345	175
3	Y	480	60	1705	813	1.51	85	1950	350
4	Y	480	60	1745	502	1.26	80	1195	520
5	Y	400	60	1580	1170	2.00	89	2550	0
6	Y	400	60	1620	982	1.76	86	2275	163
7	Y	400	60	1665	771	1.46	85	1910	336
8	Y	400	60	1725	470	1.08	80	1175	498

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · L<sub>wA<sub>in</sub></sub> = Sound power level inlet side · qv = Air flow · p<sub>fS</sub> = Pressure increase